


1. MECHANICAL & ASSEMBLY :

NOTE :IN THE WINDING INTERVAL OF N1 AND N2, SECURE DISTANCE MORE THAN 1.6mm

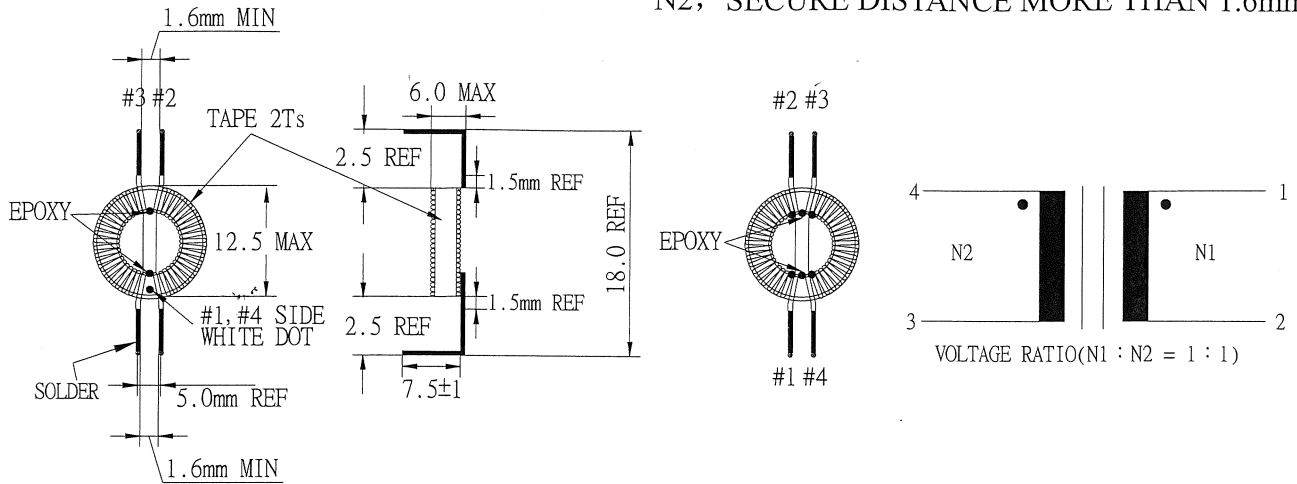

2. WINDING CONFIGURATION:

UNIT:mm

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURN	LAYER TAPE	TUBE
1	N1	~	1 - 2	0.45 ϕ	12Ts REF		
2	N2	~	4 - 3	0.45 ϕ	12Ts REF		

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1 KHz, 1.0 V	INDUCTANCE 100 KHz, 1.0 V	VOLTAGE RATIO(V) f=20 KHz	DCR(MAX.) AT 25°C
1 - 2	300uH MIN		INPUT 1Vrms	25.0m Ω
4 - 3	300uH MIN		1.0000Vrms \pm 2%	25.0m Ω
1 - 4		5.0uH MAX		
2 - 3		SHORT		