


1. MECHANICAL & ASSEMBLY :

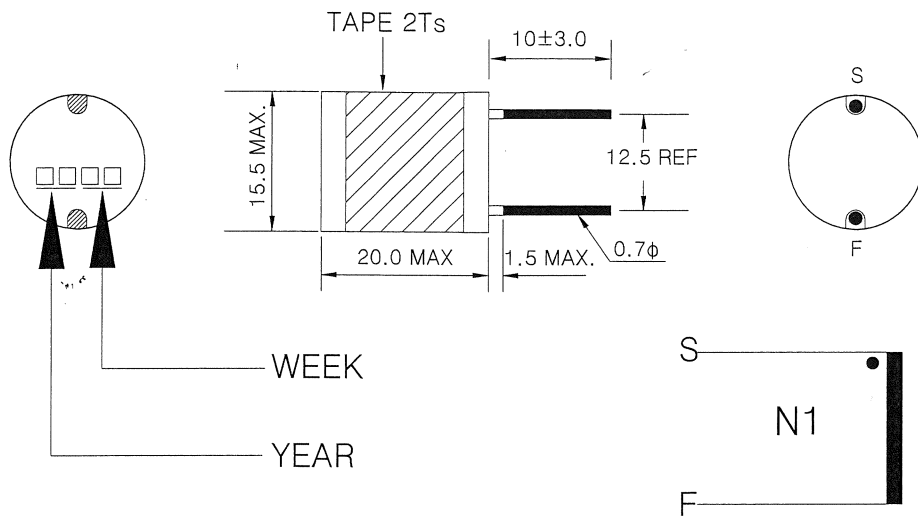

UNIT:mm

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURN	LAYER TAPE	METHOD
1	N1	~	S - F	0.70 φ	63.5Ts	2Ts	CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE		VOLTAGE RATIO(V) f= KHz	DCR(MAX.) AT 25°C
	1.0 KHz, 1.0 V	10KHz, 0.3Vrms+DC2.0A		
S - F	200uH±10%			100mΩ ± 15%