


# 1. MECHANICAL & ASSEMBLY :

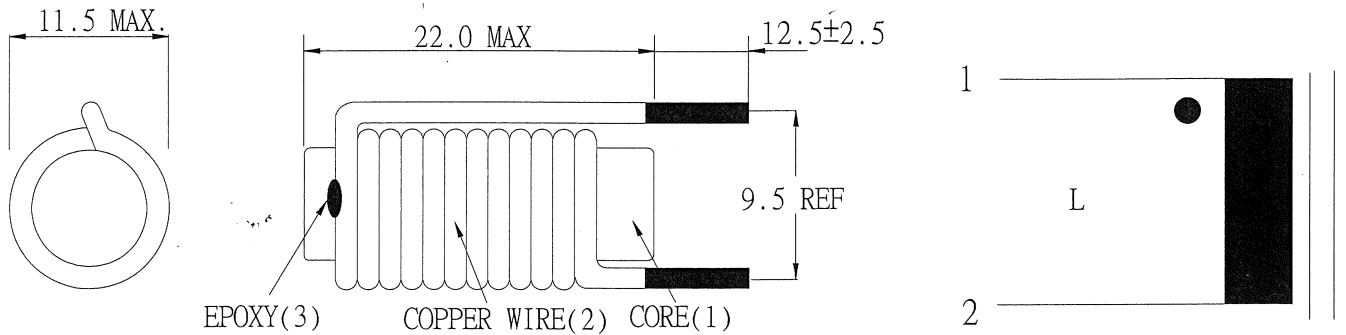

UNIT:m/m

# 2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURN	LAYER TAPE	METHOD
1	L	~	1 - 2	φ1.4	7.5Ts		CLOSE

# 3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1 KHz, 0.5 Vrms	INDUCTANCE 1 KHz, 0.5Vrms+DC12A	VOLTAGE RATIO(V) F= KHz	DCR MAX. AT 25°C
1 - 2	1.3uH +30%-20%	1.3uH +30%-20%		2.5mΩ