


1. MECHANICAL & ASSEMBLY :

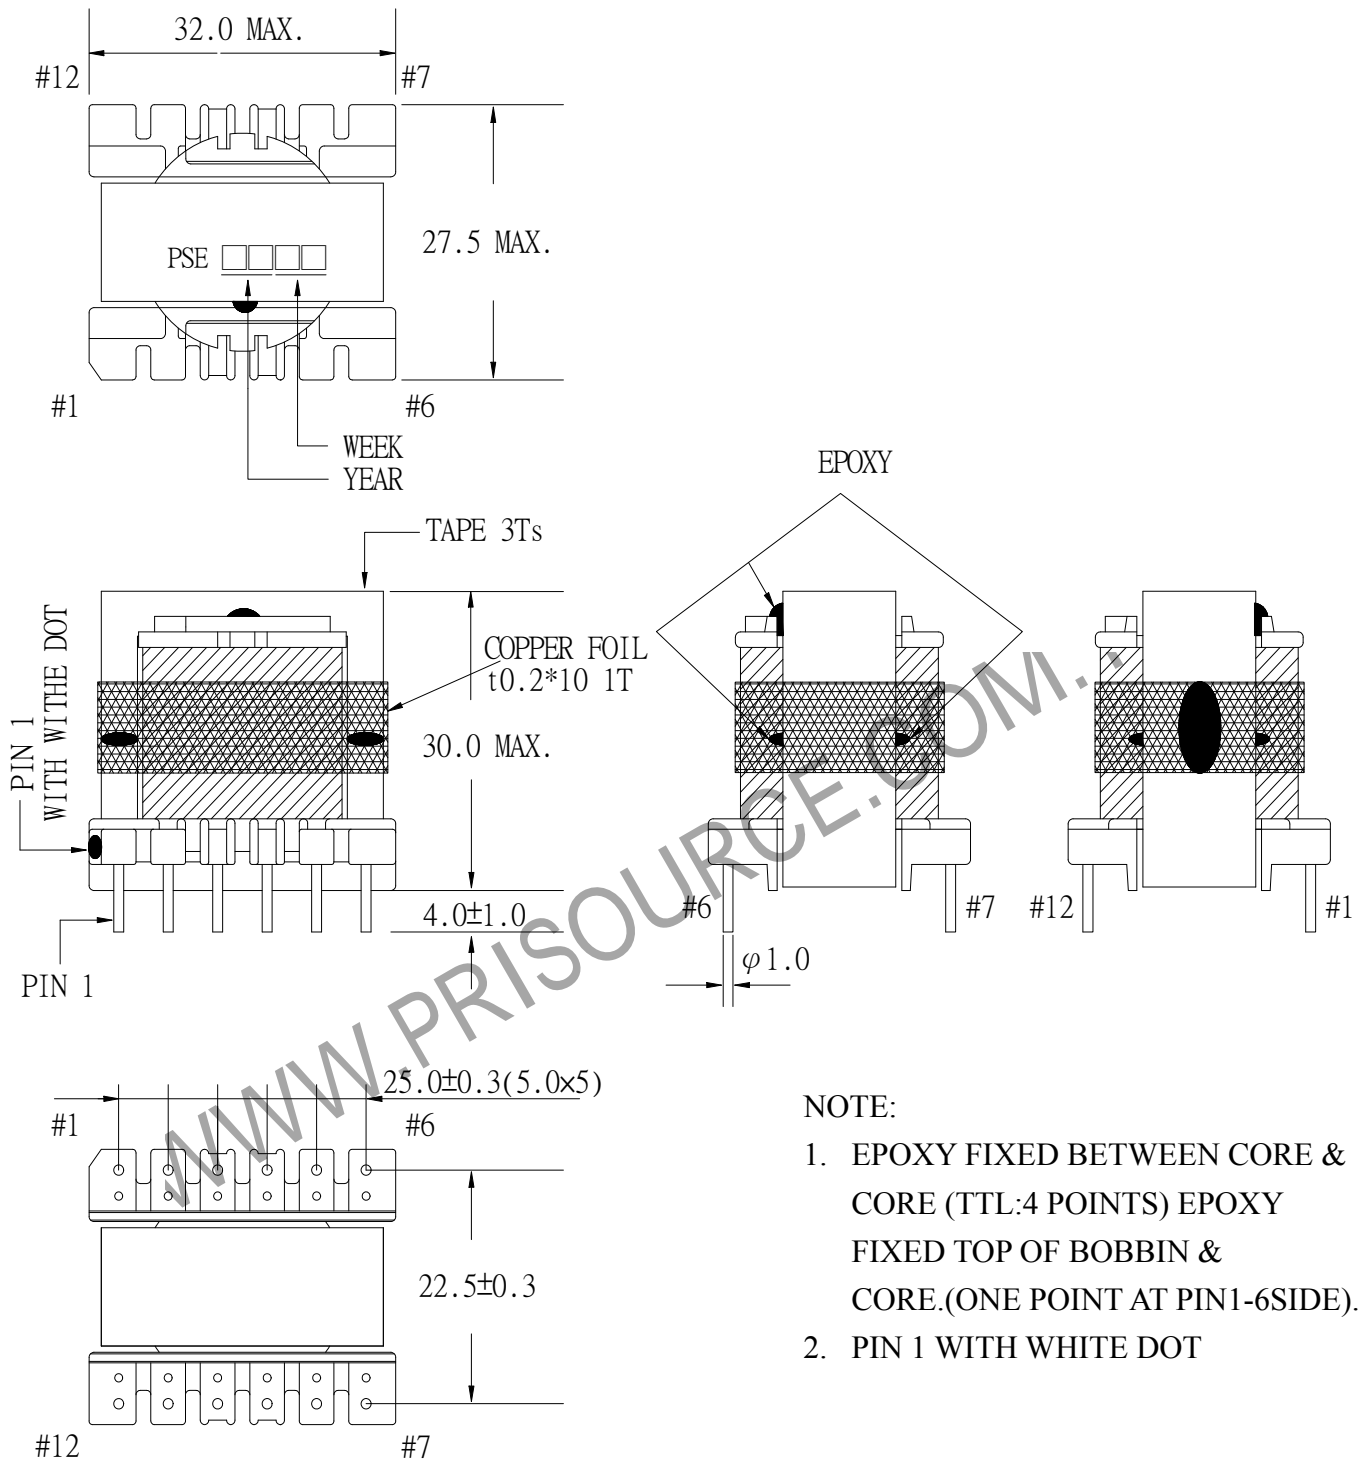

NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS) EPOXY FIXED TOP OF BOBBIN & CORE.(ONE POINT AT PIN1-6SIDE).
2. PIN 1 WITH WHITE DOT

UNIT : mm

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 54P-15050	REV NO.	
			ISSUE NO :	PAGE	4 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	TUBE	LAYER TAPE	METHOD
1	P1-1		6 - 5	0.20 ϕ	54		1T	SPACE
2	S1		11.1 - 12	TEX-E 0.60 ϕ ×2	9		2Ts	CLOSE
3	P1-2		5 - 4	0.20 ϕ	54		1T	SPACE
4	P2		2 - 1	TEX-E 0.40 ϕ ×2	10		1T	SPACE
5	S2		11.2 - 11.1	TEX-E 0.20 ϕ ×2	9	#21	2Ts	SPACE
6	P1-3		4 - 3	0.20 ϕ	54		1T	SPACE
7	S3		9 - 10	TEX-E 0.40 ϕ ×3	7		1T	SPACE
8	S4		7 - 8	TEX-E 0.20 ϕ ×2	15	#21	2Ts	SPACE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	INDUCTANCE 1.0KHz, 1.0 Vrms	VOLTAGE RATIO(V) f= 20KHz	DCR (MAX) AT 25°C
6 - 3	9.1mH±10%		INPUT 1 Vrms	
6 - 5			0.3311Vrms±4.0%	1.50 Ω .
11.1 - 12			0.0553Vrms±7.0%	16.5m Ω .
5 - 4			0.3334Vrms±4.0%	1.80 Ω .
2 - 1			0.0618Vrms±7.0%	47.0m Ω
11.2 - 11.1			0.0558Vrms±7.0%	180.0m Ω
4 - 3			0.3357Vrms±4.0%	2.15 Ω
9 - 10			0.0434Vrms±7.0%	26.0m Ω
7 - 8			0.0931Vrms±4.0%	0.35 Ω

HI-POT TEST : (AT 1 mA, 1 SEC)

PRI. TO SEC. 3600 VAC

SEC. TO SEC. 3000 VAC

PRI, SEC. TO CORE. 600 VAC

INSULATION RESISTANCE: (AT DC 500V)

PRI. TO SEC. 100 M Ω MIN.

PRI. TO CORE. 100 M Ω MIN.


SEC. TO CORE. 100 M Ω MIN.

PRI. TO PRI. 100 M Ω MIN.


SEC. TO SEC. 100 M Ω MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 54P-15050	REV NO.	
			ISSUE NO :	PAGE	4 - 2

4. WINDING SEQUENCE:

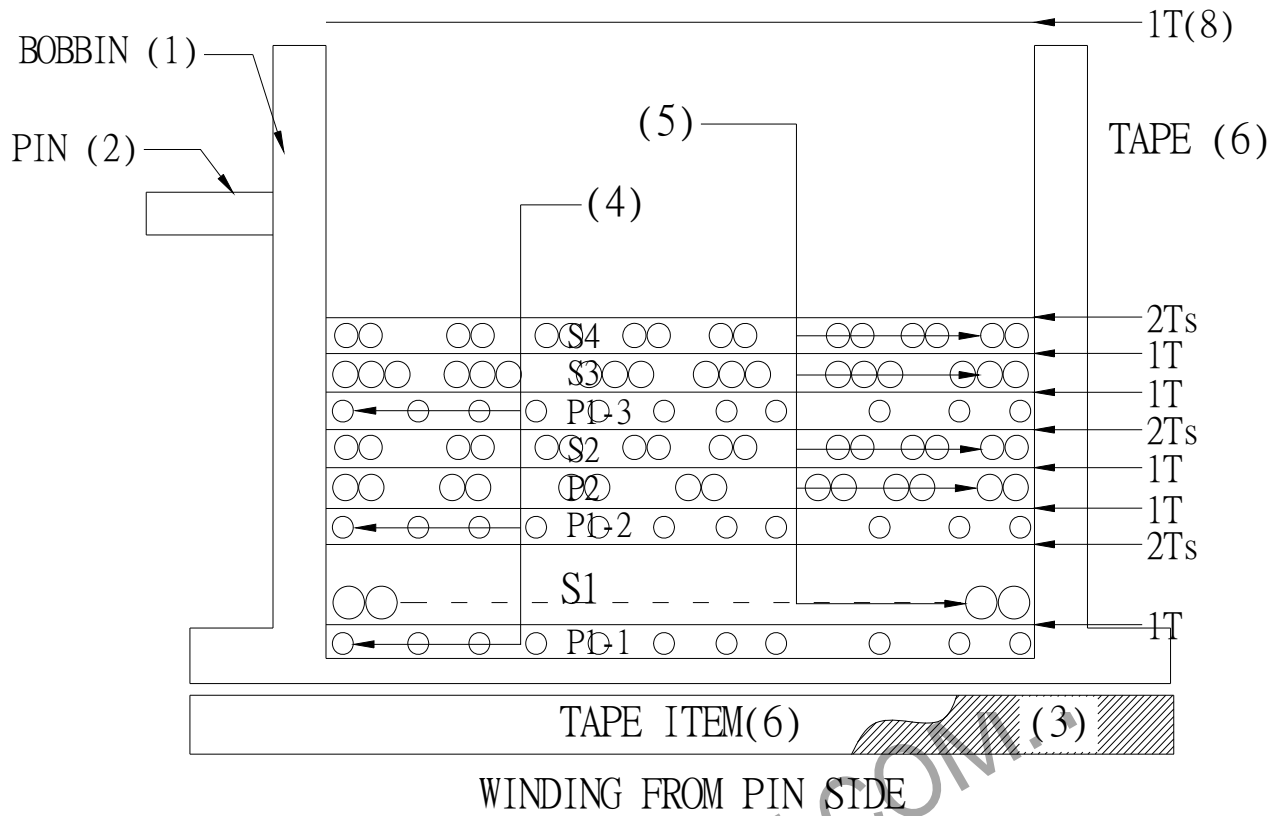

5. SCHEMATIC:

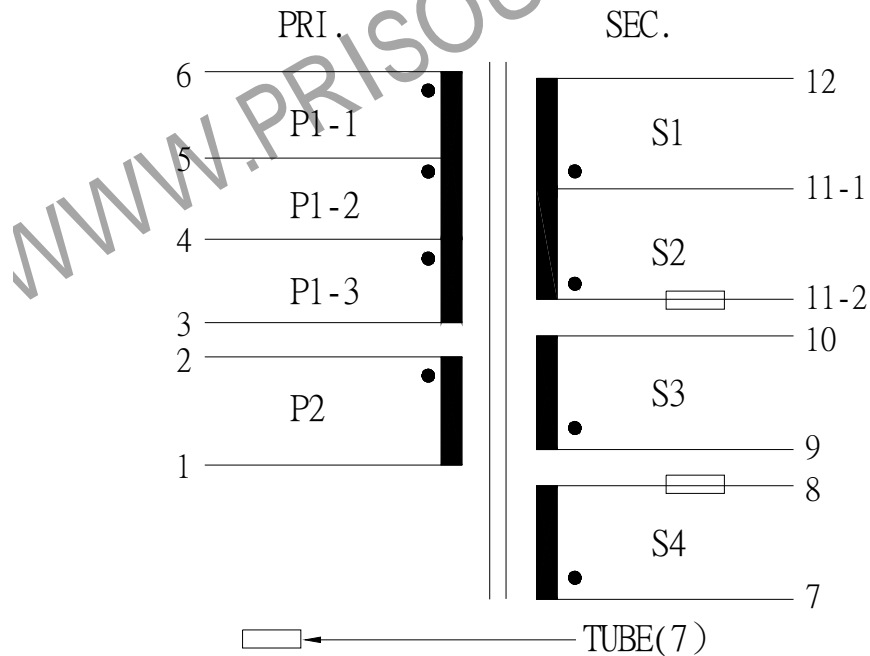

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-15050	REV NO.
			ISSUE NO :	PAGE 4 - 3

6. MATERIAL LIST :

NO.	DESCRIPTION	ITEM	MATERIAL	LIST OF SAMPLE	UL NO.	MANUFACTURER
1	BOBBIN	(1)	PHENOLIC(T375J) Thickness:0.80mm Min.	✓	E59481	CHANG CHUN
2	PIN	(2)	TINNED COPPER WIRE φ 1.0	✓		WELL FORE
3	CORE	(3)	FERRITE CORE EER28 (TP4)	✓		TDG
4	COPPER WIRE	(4)	POLYURETHANE (1UEW) TYPYU-130 MW75-C	✓	E197768	HENG YA
5	TRIPLE WIRE	(5)	TEX-E	✓	E206440	FURUKAWA
6	MYLAR TAPE	(6)	POLYESTER FILM #1350F-1 Y	✓	E17385	3M
	TUBE	(7)	TEFLON TUBE TEL	✓	E156256	GREAT HOLDING
7	COPPER FOIL	(8)	t0.2×10	✓		
8	EPOXY		6020H	✓	E229633	WELLS
9	VARNISH		TVB2180T	✓	E83702	KYOCERA

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 54P-15050	REV NO.	
			ISSUE NO :	PAGE	4 - 4