
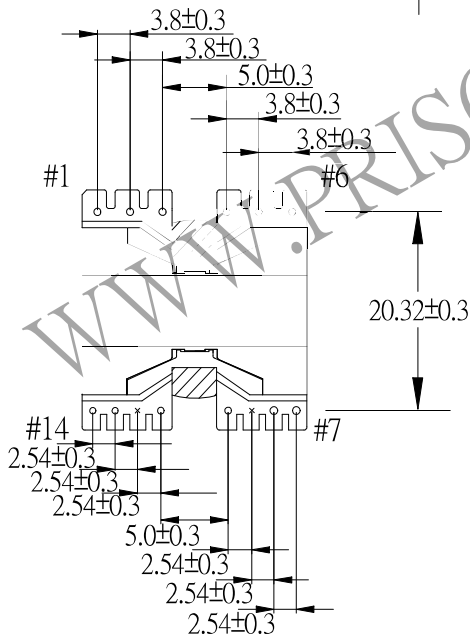
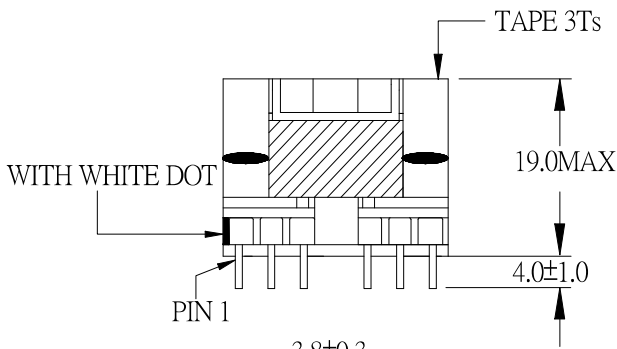
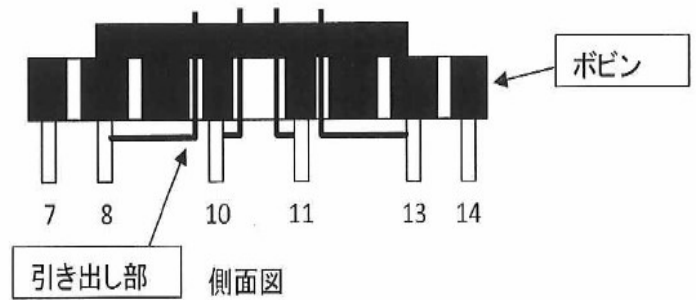


1.MECHANICAL & ASSEMBLY:

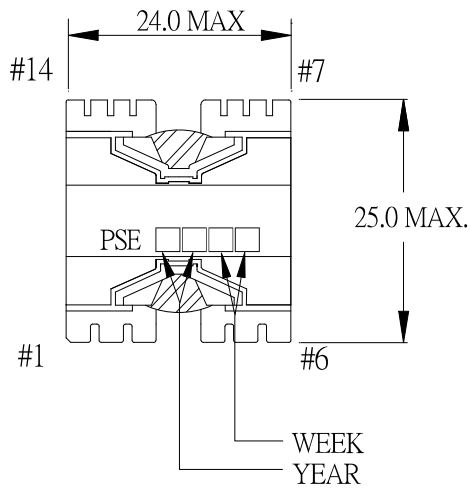

NOTE:

1. PIN 9,12 NO
2. PIN 1 WITH WHITE DOT
3. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS)
4. ADD ONE DROPS OF GLUE INSIDE OF THE CORE TOP.
5. PULL THE LEAD WIRE 8 & 13 OUT FROM SLOT (9,10) & (11,12)

UNIT : mm

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-17032	REV NO.
			ISSUE NO :	PAGE 4 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	METHOD
1						1T	
2	P3	1.6mm/3.5mm×1T	5 - 6	0.12φ	2	2Ts	SPACE
3	P1	1.6mm/3.5mm×4Ts	1 - 2	0.23φ	9	4Ts	BIFILAR, CLOSE
4	P2		2 - 3	0.23φ	9		
5	S1	1.6mm/3.5mm×1T	8 - 10	0.12φ	9	2Ts	CLOSE
6	S2	1.6mm/3.5mm×1T	11 - 13	0.12φ	9	2Ts	CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	LEAKAGE INDUCTANCE KHz, mVrms	VOLTAGE RATIO(V) f= 20KHz	DCR MAX AT 25°C
1 - 3	200uH ±15%		INPUT 1 Vrms	0.4 Ω.
5 - 6			0.1098Vrms±4.0%	210.0 mΩ.
1 - 2			0.4988Vrms±4.0%	210.0 mΩ.
2 - 3			0.4992Vrms±4.0%	195.5 mΩ.
8 - 10			0.4956Vrms±4.0%	0.85 Ω.
11 - 13			0.4946Vrms±4.0%	0.90 Ω.

HI-POT TEST : (AT 1 mA, 2 SEC.)

PRI	TO	SEC	1800VAC
PRI	TO	PRI	1800VAC
PRI, SEC	TO	CORE	1800VAC
SEC	TO	SEC	1800VAC


INSULATION RESISTANCE: (AT DC 500V)

PRI	TO	SEC	100 MΩ ≧.
PRI	TO	PRI	100 MΩ ≧.
PRI, SEC	TO	CORE	100 MΩ ≧.
SEC	TO	SEC	100 MΩ ≧.

INSULATION CLASS : CLASS E (120°C)


REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 54P-17032	REV NO.	
			ISSUE NO :	PAGE	4 - 2

4. WINDING SEQUENCE:

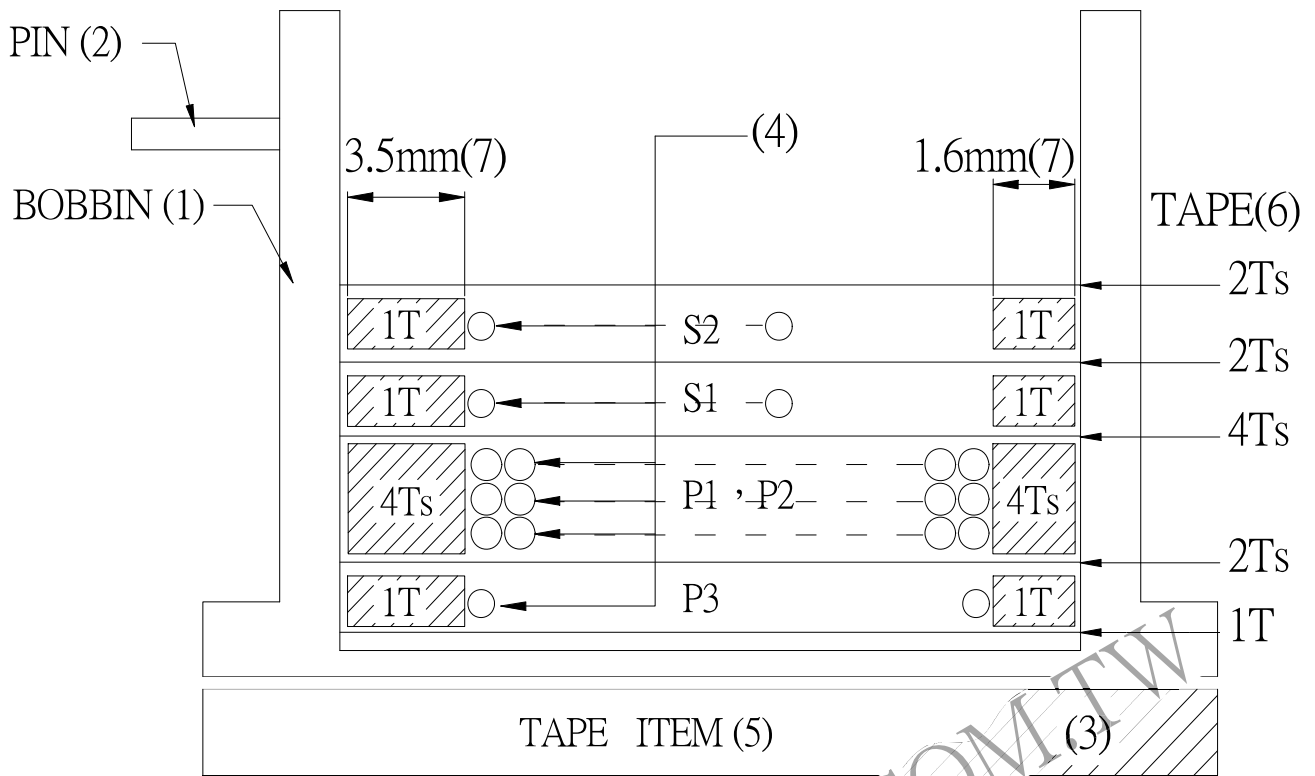

WINDING FROM PIN SIDE

5. SCHEMATIC:

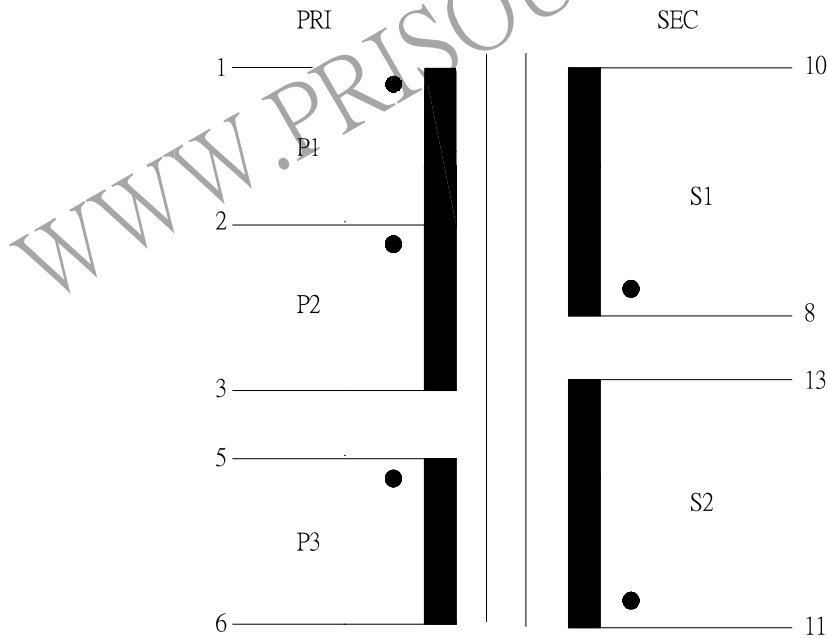

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-17032	REV NO.
			ISSUE NO :	PAGE 4 - 3