


1. MECHANICAL & ASSEMBLY :

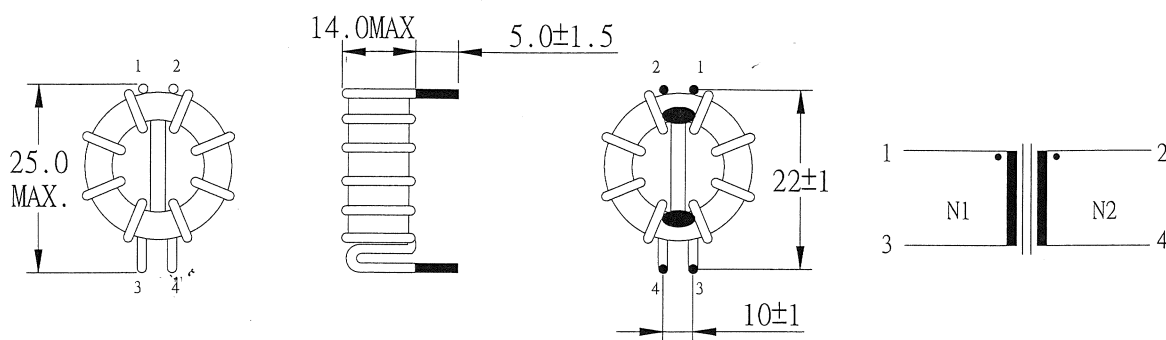

NOTE:

1. EPOXY FIXED BETWEEN BOTTOM OF CORE & SPACER (TTL:2 POINTS)

UNIT:m/m

2. NOT dipped in varnish

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURN	LAYER TAPE	METHOD
1	N1	~	1 - 3	1.0 ϕ	7 REF		SPACE
2	N2	~	2 - 4	1.0 ϕ	7 REF		SPACE

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 10.0 KHz, 1.0 V	INDUCTANCE KHz, $V_{rms}+DCA$	VOLTAGE RATIO(V) $f= 20$ KHz	DCR(MAX.) AT 25°C
1 - 3	36.0uH \pm 30%		INPUT 1V	7.0m Ω
2 - 4	36.0uH \pm 30%		0.9855V $_{rms} \pm 3.0\%$	7.0m Ω