


1. MECHANICAL & ASSEMBLY :

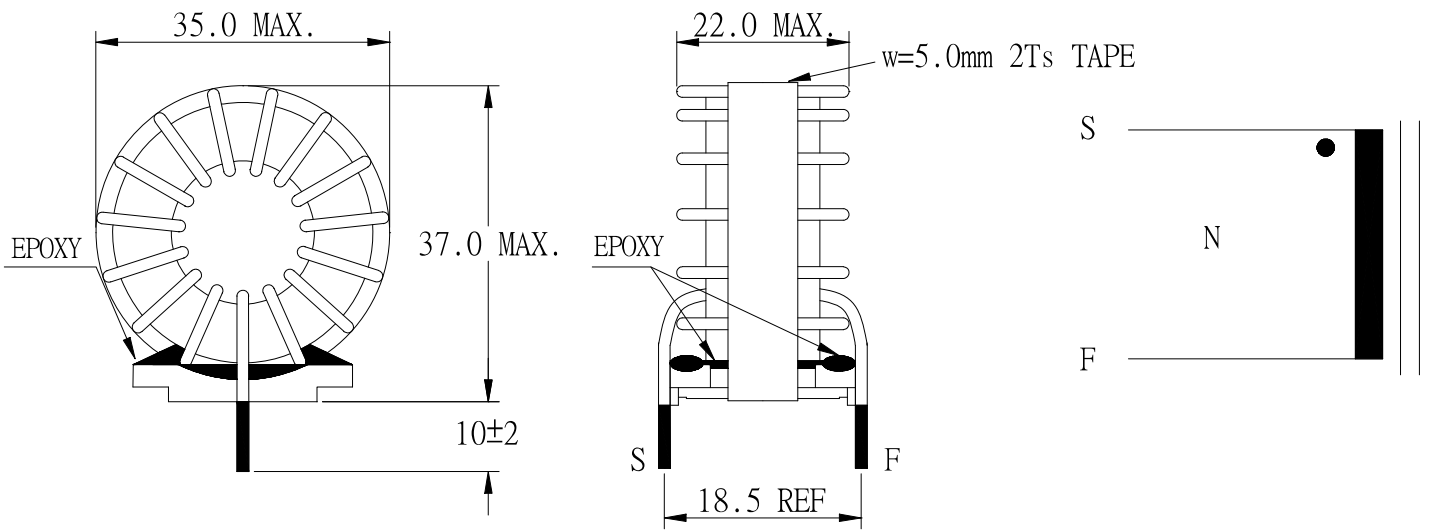

UNIT : m/m

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURN	LAYER TAPE	METHOD
1	N		S - F	0.4φ/24	14Ts .		CLOSE

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 10 KHz, 1V	INDUCTANCE KHz, Vrms +DCA	DCR(MAX.) AT 25°C
S - F	30.8 uH ±10%		5.0m Ω

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 83K-13011	REV NO.
			ISSUE NO :	PAGE 2 - 1