
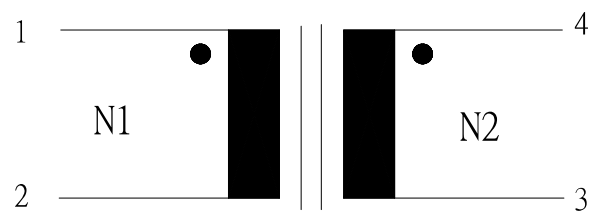


1. MECHANICAL & ASSEMBLY :

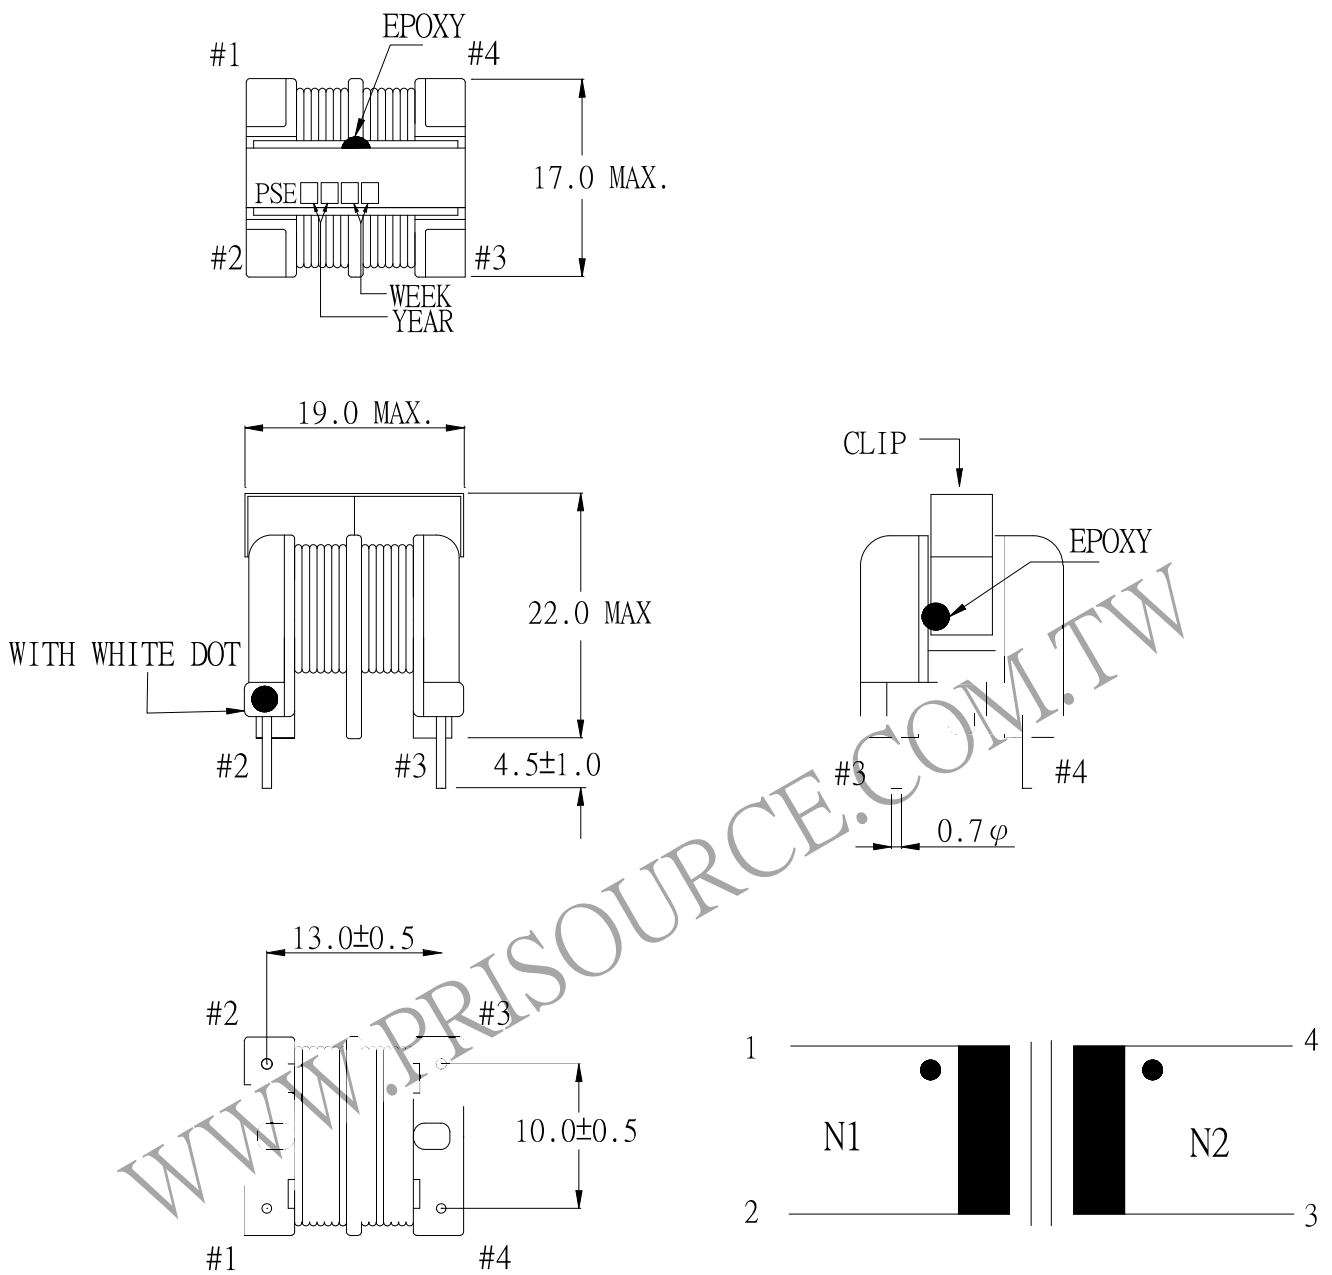

UNIT : mm

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 85F-15001	REV NO.	
			ISSUE NO :	PAGE	3 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	METHOD
1	N1		1 - 2	0.3φ	66 REF.		CLOSE
2	N2		4 - 3	0.3φ	66 REF.		CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1.0KHz, 1.0 Vrms	Q VALUE 10KHz, 0.1 Vrms	VOLTAGE RATIO(V) F = KHz	DCR MAX. AT 25°C
1 - 2	9.0 mH Min			1.8 Ω
4 - 3	9.0 mH Min			1.8 Ω

HI-POT TEST: (AT 1 mA, 1 SEC.)

COIL. TO COIL. 2000 VAC

INSULATION RESISTANCE: (AT DC 500V)

COIL. TO COIL 100MΩ Min.

RATED CURRENT: 0.7A

RATED VOLTAGE: 300V

TEMPERATURE CLASS: MEET CLASS F (155°C) INSULATION SYSTEM
"SBI5.1"

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 85F-15001	REV NO.	
			ISSUE NO :	PAGE	3 - 2