

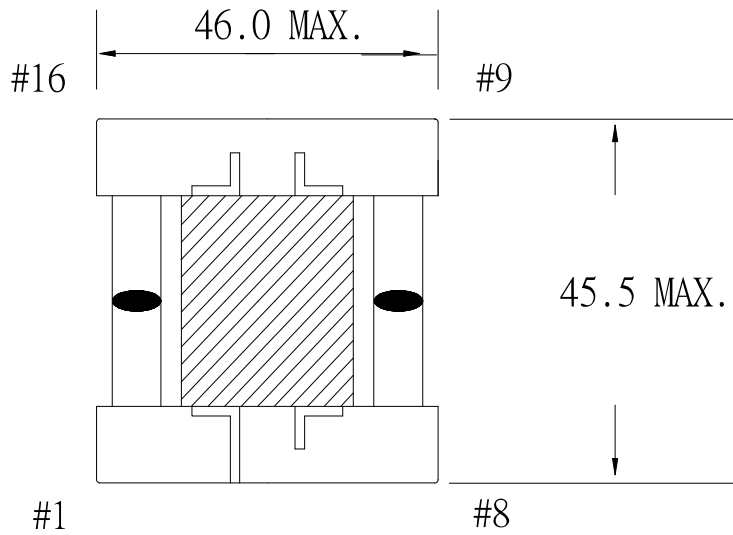
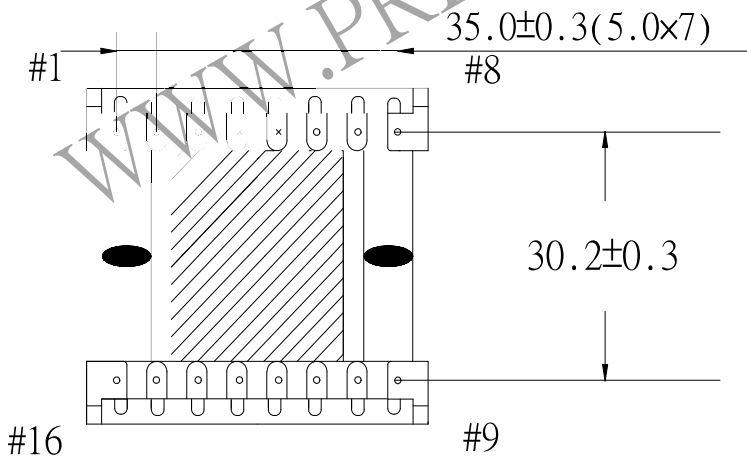


1. MECHANICAL & ASSEMBLY :

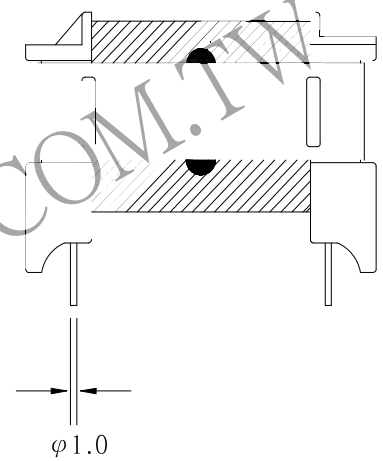

NOTE:

1. PIN 4, PIN5 NO
2. EPOXY FIXED TOP OF BOBBIN & CORE.(ONE POINT AT PIN1-8 SIDE).
3. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS)
4. ADHESIVE EP-138 FIXED BETWEEN CORE & CORE (TTL:2 POINTS)
5. MEET CLASS F INSULATION SYSTEM "SBI5.1" E181448

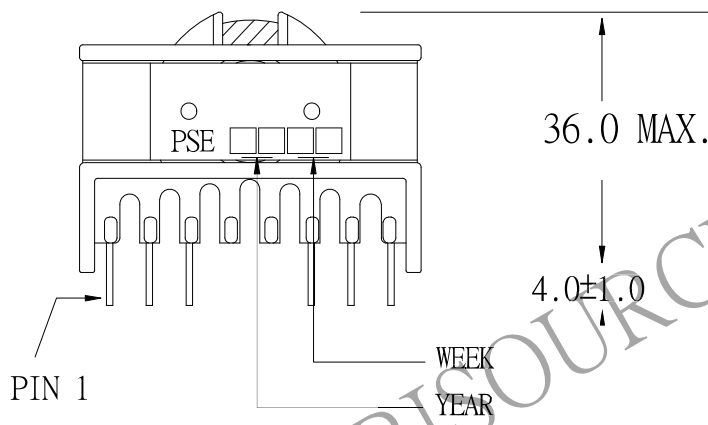

UNIT : m/m

REPORT	BY	CHECK	BY	APPROVED	BY	CUSTOMER :	DATE	
						PART NO : 38P-16003	REV NO.	
						ISSUE NO :	PAGE	4 - 1

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	TUBE	METHOD
1	P1	4.0mm/4.0mm×3Ts	2 - 6	0.55φ × 2	29	3Ts	#16/#16	CLOSE
2	S1	4.0mm/4.0mm×3Ts	10 - 12	0.60φ × 3	18	1T	#15/#15	CLOSE
3	S2	4.0mm/4.0mm×3Ts	13 - 15	0.60φ × 3	18	3Ts	#15/#15	CLOSE
4	P2	4.0mm/4.0mm×3Ts	1 - 7	0.55φ × 2	29	3Ts	#16/#16	CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 100 KHz, 1 Vrms	INDUCTANCE 100 KHz, 1 Vrms	VOLTAGE RATIO(V) f= 20KHz	DCR MAX AT 25°C
1,2 - 6,7	1.65 mH MIN.	4.0 uH MAX.		44.0 mΩ
2 - 6			INPUT 1 Vrms,	70.0 mΩ
10 - 12		SHORT	0.6206Vrms±3.0%	28.5 mΩ
13 - 15		SHORT	0.6206Vrms±3.0%	33.5 mΩ
1 - 7			0.9972Vrms±3.0%	113.5 mΩ
PIN NO.	WINDING CAPACITANCE			
(1-7) TO (10-15)	200.0 pF MAX.			

HI-POT TEST :(AT 10 mA , 1 SEC.)

P1,P2 TO S1,S2 3600 VAC

P1,P2 TO CORE 1800 VAC

S1,S2 TO CORE 1800 VAC

INSULATION RESISTANCE:(AT DC 500V)


P1,P2 TO S1,S2 100 MΩ MIN.

P1,P2 TO CORE 100 MΩ MIN.

S1,S2 TO CORE 100 MΩ MIN.


REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 38P-16003	REV NO. NO.	
			ISSUE NO :	PAGE	4 - 2

4. WINDING SEQUENCE

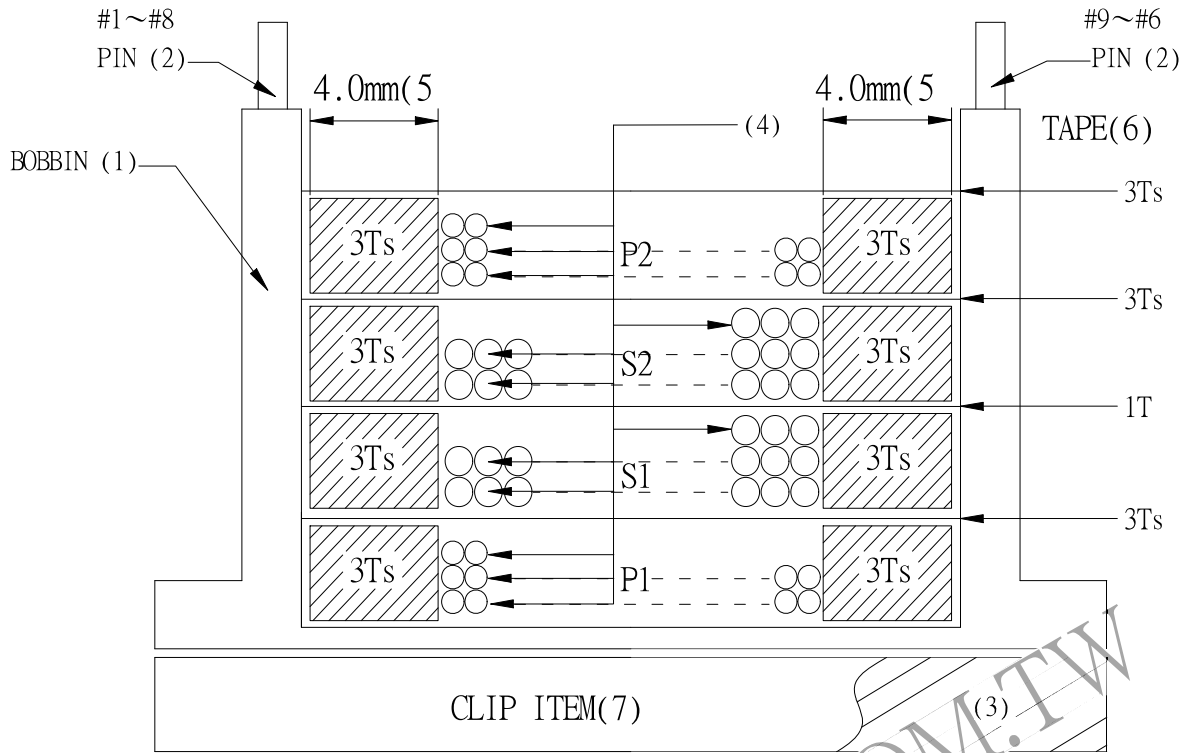

P1, P2 WINDING FROM PIN 1-8 SIDE
 S1, S2 WINDING FROM PIN 9-16 SIDE

5. SCHEMATIC :

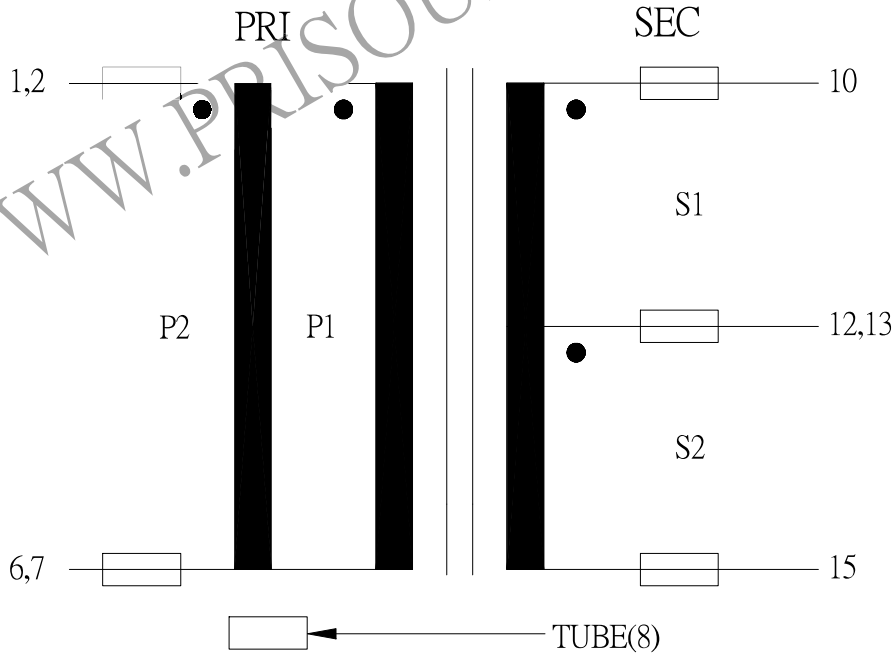

REPORT	BY	CHECK	BY	APPROVED	BY	CUSTOMER :	DATE	
						PART NO : 38P-16003	REV NO.	
						ISSUE NO :	PAGE	4 - 3