


1. MECHANICAL & ASSEMBLY :

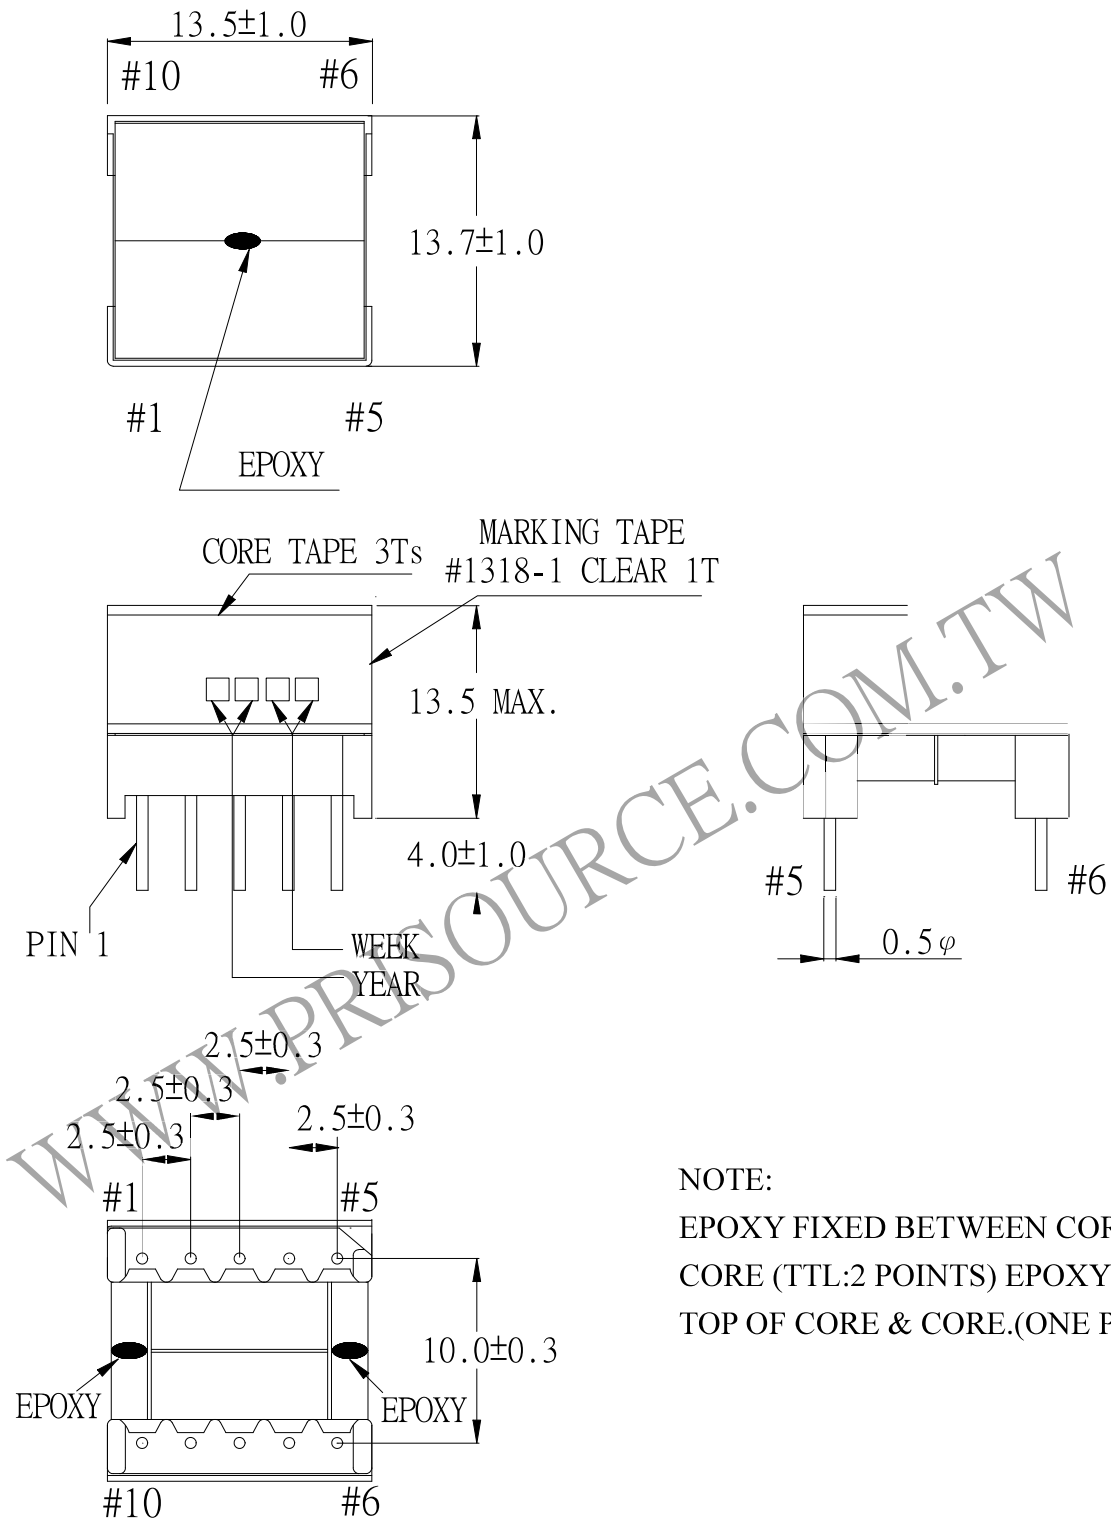

NOTE:
EPOXY FIXED BETWEEN CORE &
CORE (TTL:2 POINTS) EPOXY FIXED
TOP OF CORE & CORE.(ONE POINT).

UNIT : m/ m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-13115	REV NO.
			ISSUE NO :	PAGE
				4 - 1

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	METHOD
1	P		1 - 5	TEX-E 0.26φ	2		SPACE
2	S		10 - 6	TEX-E 0.26φ	2		SPACE

NOTE:

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 1.0 KHz, 0.3Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO(V) f= 20KHz INPUT 0.1 Vrms	DCR MAX AT 25°C
1 - 5	21.76~36.3uH		0:1000Vrms±3%	18.0 mΩ
10 - 6				18.0 mΩ

HI-POT TEST : (AT 0.5 mA, 2 SEC)


P TO S 1200 VAC

INSULATION RESISTANCE: (AT DC 500V)


P TO S 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-13115	REV NO.
			ISSUE NO :	PAGE 4 - 2

4. WINDING SEQUENCE:

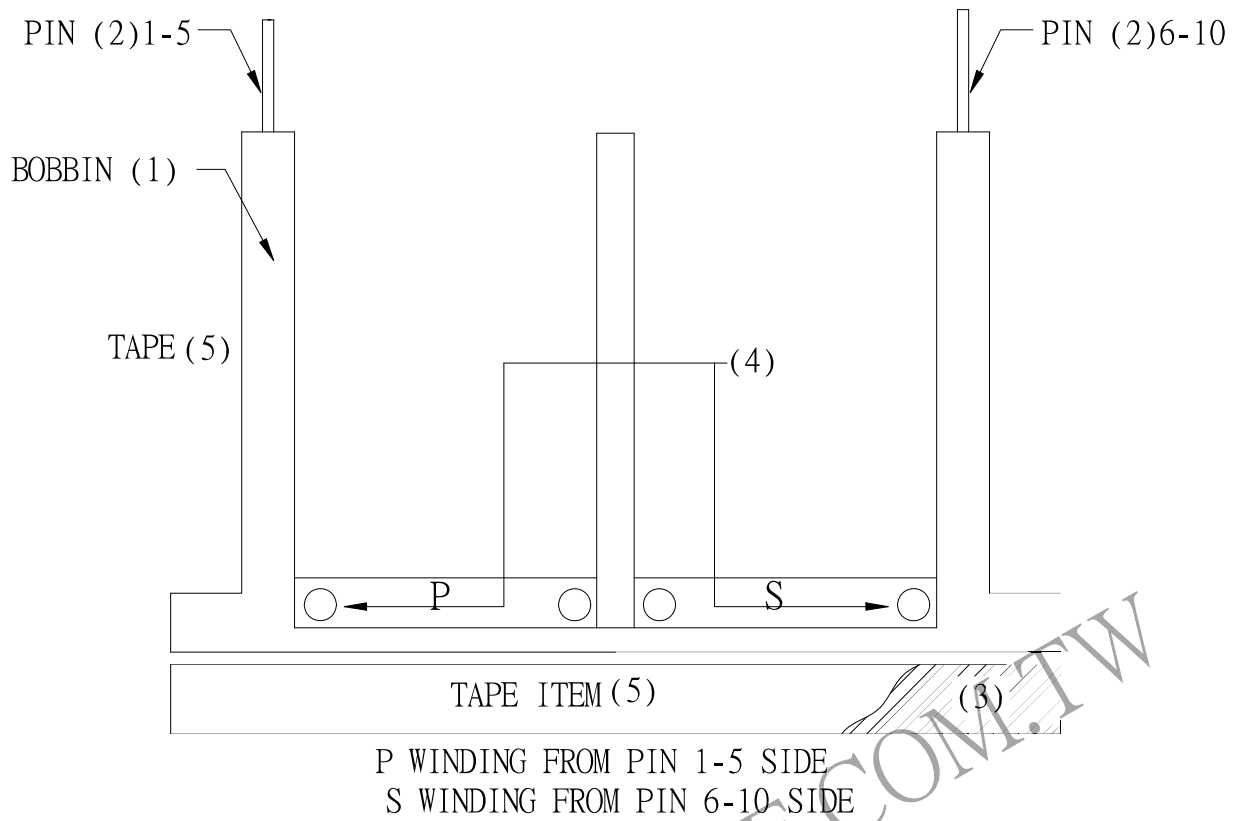

5. SCHEMATIC:

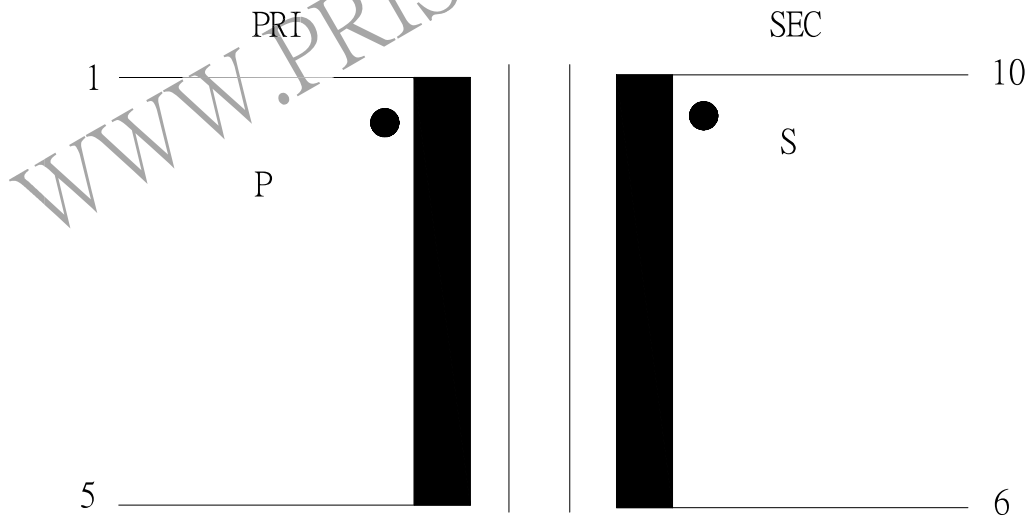

REPORT	BY	CHECK	APPROVED BY	CUSTOMER :	DATE	
				PART NO : 54P-13115	REV NO.	
				ISSUE NO :	PAGE	4 - 3