
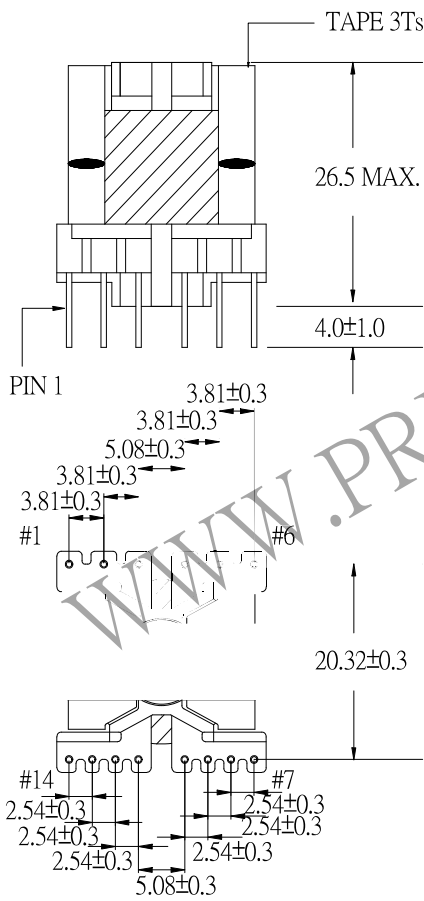
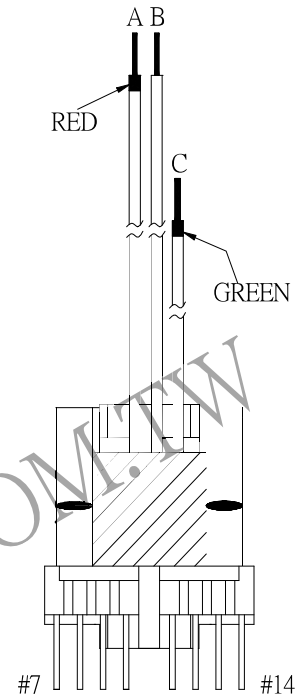
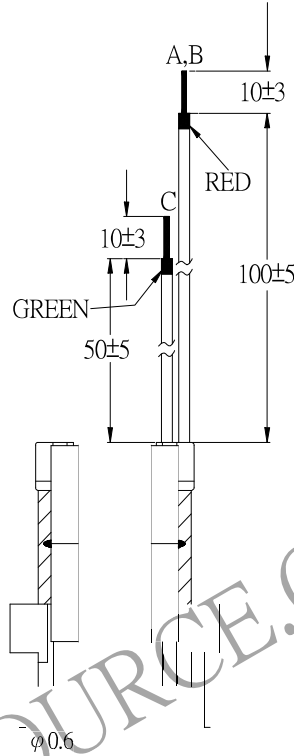


1. MECHANICAL & ASSEMBLY :

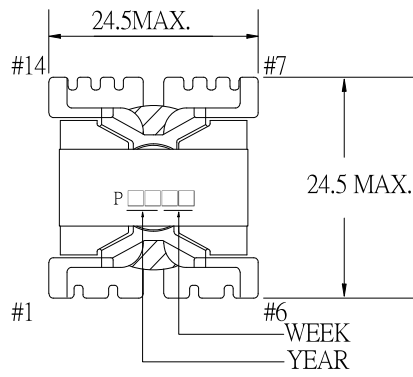

NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS)
2. EPOXY FIXED TOP OF BOBBIN & CORE (ONE POINT)

UNIT : mm

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-15102	REV NO.
			ISSUE NO :	PAGE
				4-1

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	TUBE	METHOD
1	A	1.5mm/1.5mm×3Ts	6 - 4	0.14φ	201	1T	#26	CLOSE
2	F	1.5mm/1.5mm×2Ts	3 - 1	0.40φ	17	2Ts	#22	CLOSE
3	SHIELD	1.5mm/1.5mm×1T	C -	t0.025×7	1	1T	0.6φ	CLOSE Center
4	C	~/1.5mm×1T	11 - 12	0.40φ	7	1T		CLOSE
5	B	1.5mm/~×1T	13 - 14	0.40φ	7	1T		CLOSE
6	E	~/1.5mm×1T	7 - 8	0.40φ	7	1T		CLOSE
7	D	1.5mm/~×1T	9 - 10	0.40φ	7	1T		CLOSE
8	G	1.5mm/1.5mm×1T	B - A	0.30φ	24	2Ts	0.6φ	CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	LEAKAGE INDUCTANCE KHz, mVrms	VOLTAGE RATIO(V) f= 20KHz	DCR MAX AT 25°C
6 - 4	5.03mH ±10%		INPVT 1Vrms	10.5 Ω
3 - 1			0.0851Vrms±5%	130.0mΩ
11 - 12			0.0344Vrms±7%	70.0mΩ
13 - 14			0.0354Vrms±7%	70.0mΩ
7 - 8			0.0344Vrms±7%	70.0mΩ
9 - 10			0.0352Vrms±7%	70.0mΩ
B - A			0.1196Vrms±4%	0.46 Ω

HI-POT TEST : (AT 1 mA, 2 SEC.)


PRI TO SEC 2640VAC
PRI TO CORE 2640VAC

INSULATION RESISTANCE: (AT DC 500V)


PRI TO SEC 100 MΩ MIN.
PRI TO CORE 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 54P-15102	REV NO. NO.	
			ISSUE NO :	PAGE	4-2

4. WINDING SEQUENCE:

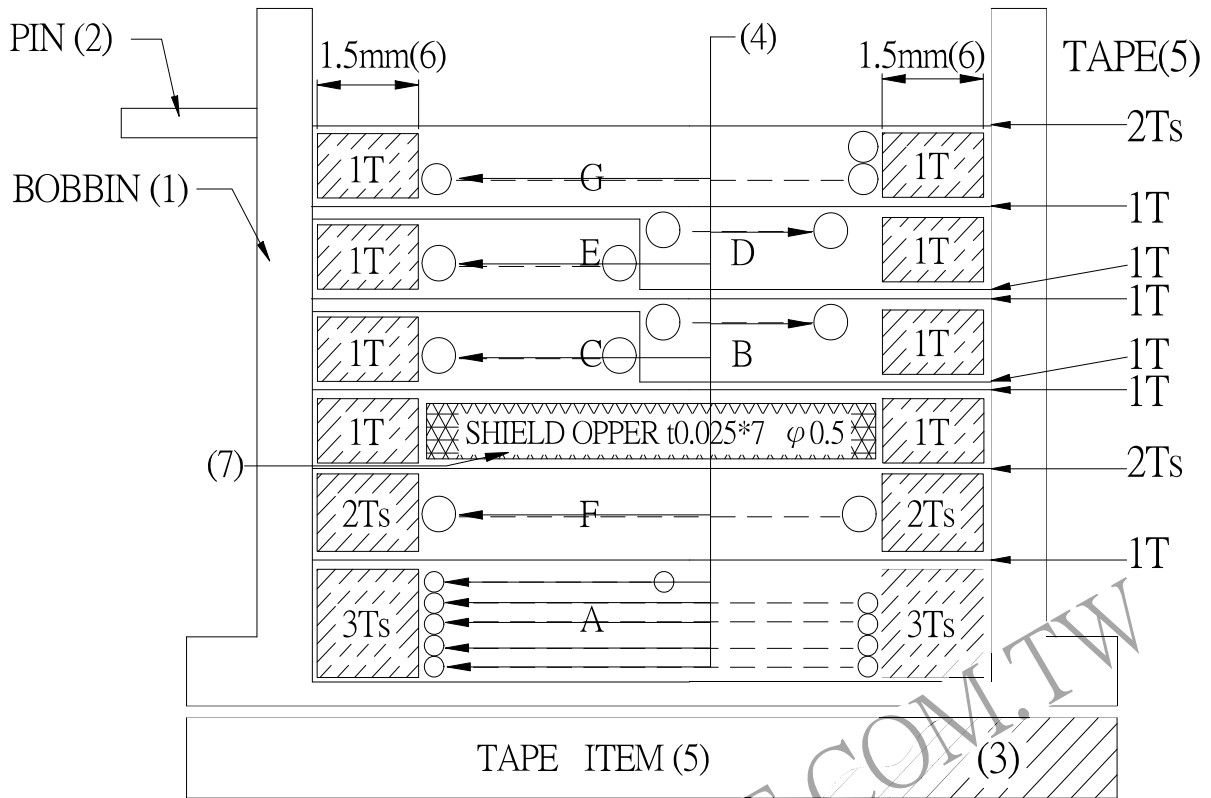

5. SCHEMATIC:

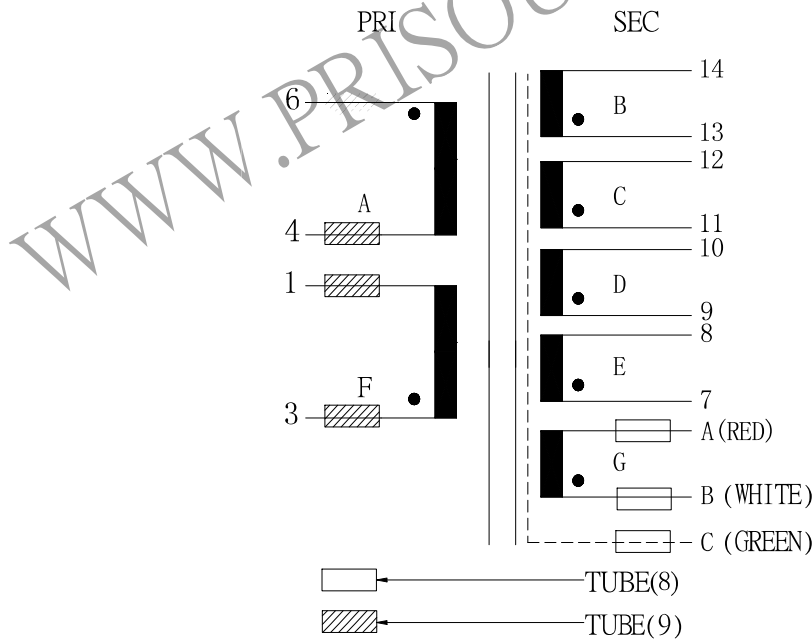

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-15102	REV NO. NO.
			ISSUE NO :	PAGE 4-3