


1. MECHANICAL & ASSEMBLY :

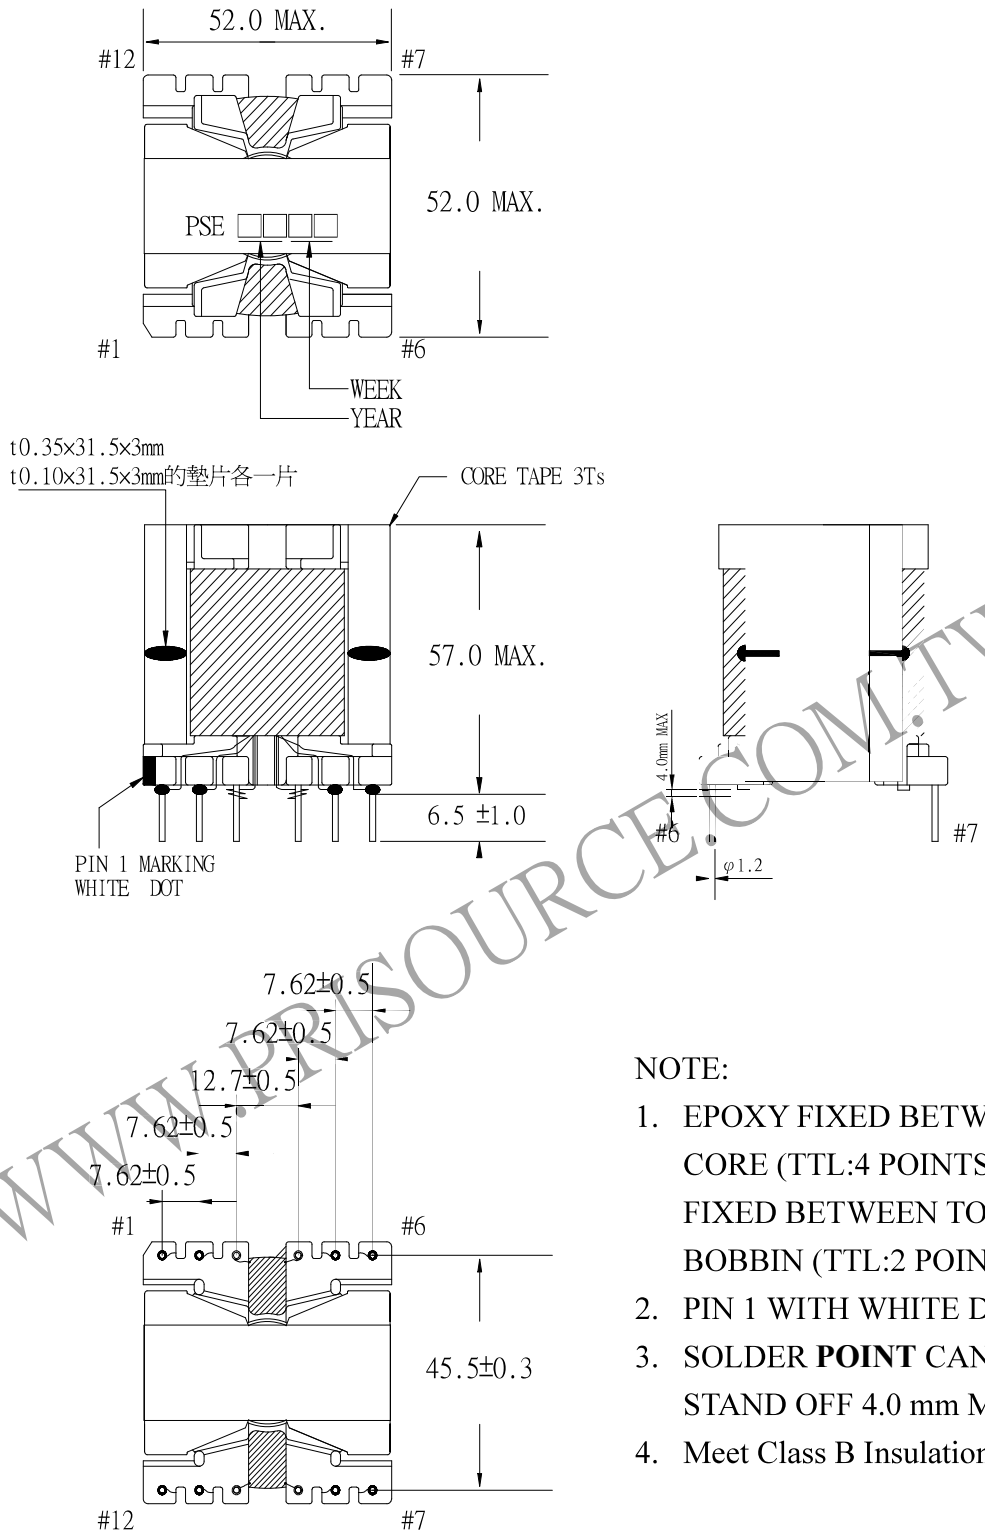

NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS) EPOXY FIXED BETWEEN TOP CORE & BOBBIN (TTL:2 POINTS)
2. PIN 1 WITH WHITE DOT
3. SOLDER POINT CAN BE OVER STAND OFF 4.0 mm MAX
4. Meet Class B Insulation System SBI4.2

UNIT : m/m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 54P-16078	REV NO.	
			ISSUE NO :	PAGE	4 - 1

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	URNS	LAYER TAPE	TUBE	METHOD
1						1T		
2	P1	3.0/3.0mm×2Ts	5 - 1	0.65φ×2	17	1T		SPACE
3	P2	3.0/3.0mm×2Ts	5 - 1	0.65φ×2	17	1T		SPACE
4	SL1	2.0/2.0mm×1T	1 - ~	t0.05×28 0.2φ	1	3Ts		Center
5	S1	3.0/3.0mm×2Ts	11 - 7	0.55φ×2	20	1T		SPACE
6	S2	3.0/3.0mm×2Ts	11 - 7	0.55φ×2	20	3Ts		SPACE
7	SL2	2.0/2.0mm×1T	2 - ~	t0.05×28 0.2φ	1	1T		Center
8	P3	3.0/3.0mm×2Ts	6 - 2	0.65φ×2	17	1T		SPACE
9	P4	3.0/3.0mm×2Ts	6 - 2	0.65φ×2	17	1T		SPACE
10	P5	3.0/3.0mm×1T	4 - 3	0.20φ	1	1T	φ0.8	Center
11	P6	3.0/3.0mm×1T	10 - 9	0.20φ	1	1T	φ0.8	Center
12	SL3	2.0/2.0mm×1T	2 - ~	t0.05×28 0.2φ	1	3Ts		Center
13	S3	3.0/3.0mm×2Ts	12 - 8	0.55φ×2	20	1T		SPACE
14	S4	3.0/3.0mm×2Ts	12 - 8	0.55φ×2	20	3Ts		SPACE

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO(V) F= 20KHz	DCR MAX. AT 25°C
5 - 1	150uH±10%		INPUT 1 Vrms	23.5 mΩ
11 - 7			1.1731 Vrms±3.0%	43.0 mΩ
6 - 2	150uH±10%		0.9912 Vrms±3.0%	31.5 mΩ
12 - 8			1.1584 Vrms±3.0%	60.5 mΩ
4 - 3			0.0581 Vrms±5.0%	124.5mΩ
10 - 9			0.0588 Vrms±5.0%	127.0mΩ

HI-POT TEST:(AT 1 mA, 2 SEC.)

PRI, SEC. TO CORE. 1800 VAC

PRI, TO PRI. 1800 VAC

PRI. TO SEC. 1800 VAC

INSULATION RESISTANCE:(AT DC 500V)


PRI, SEC TO CORE. 100 MΩ MIN.

PRI, TO PRI. 100 MΩ MIN.


PRI. TO SEC. 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-16078	REV NO.
			ISSUE NO :	PAGE 4 - 2

4. WINDING SEQUENCE:

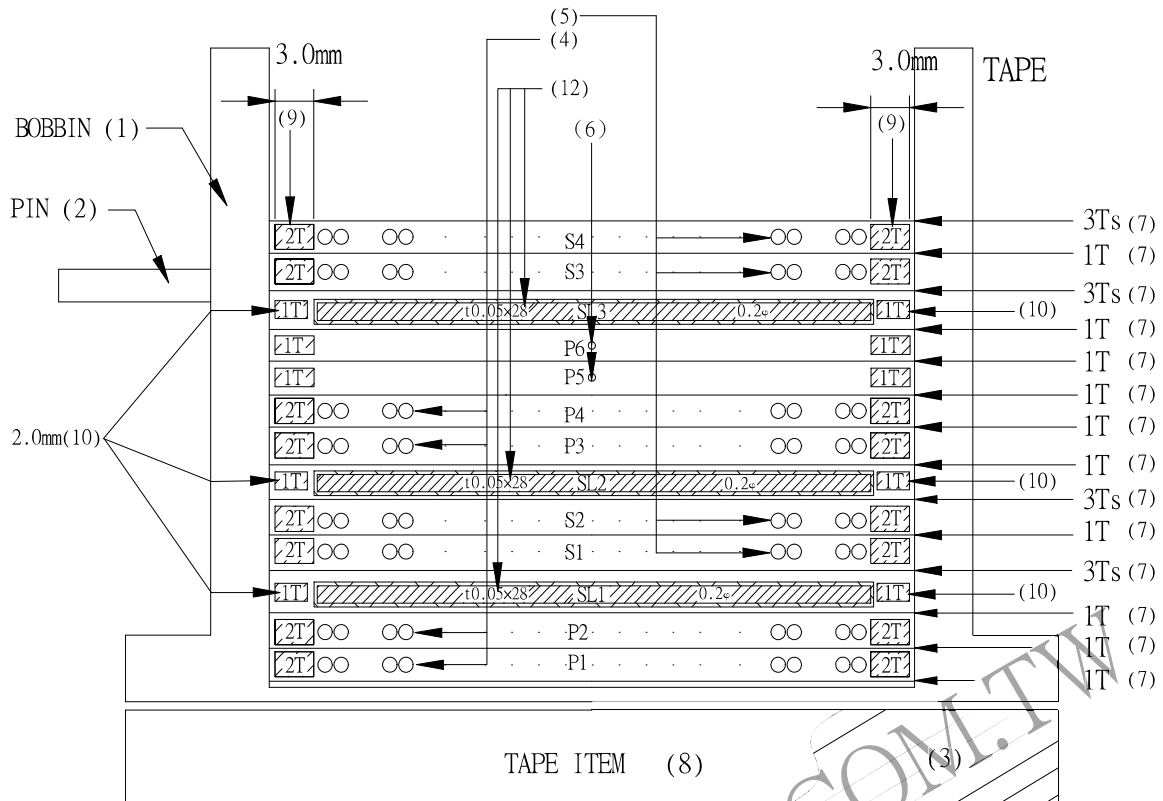

5. SCHEMATIC:

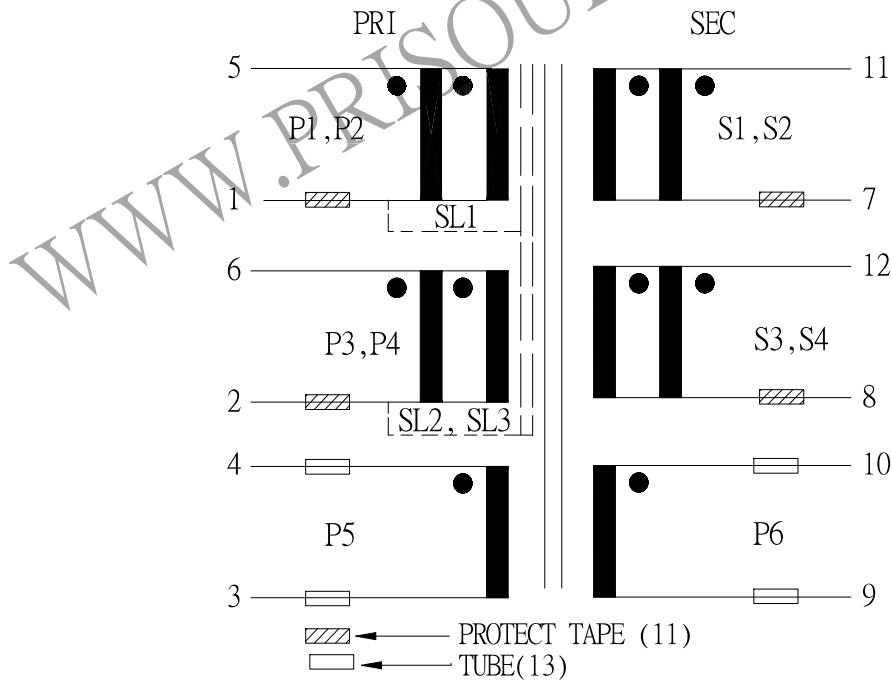

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-16078	REV NO.
			ISSUE NO :	PAGE
				4 - 3