
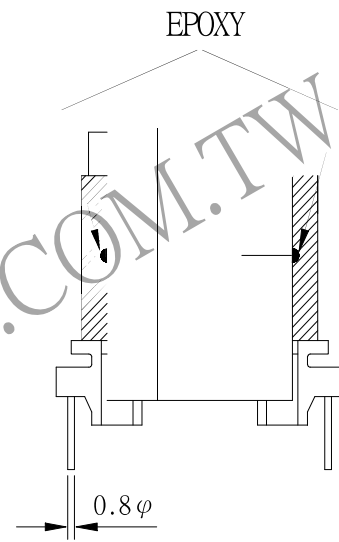
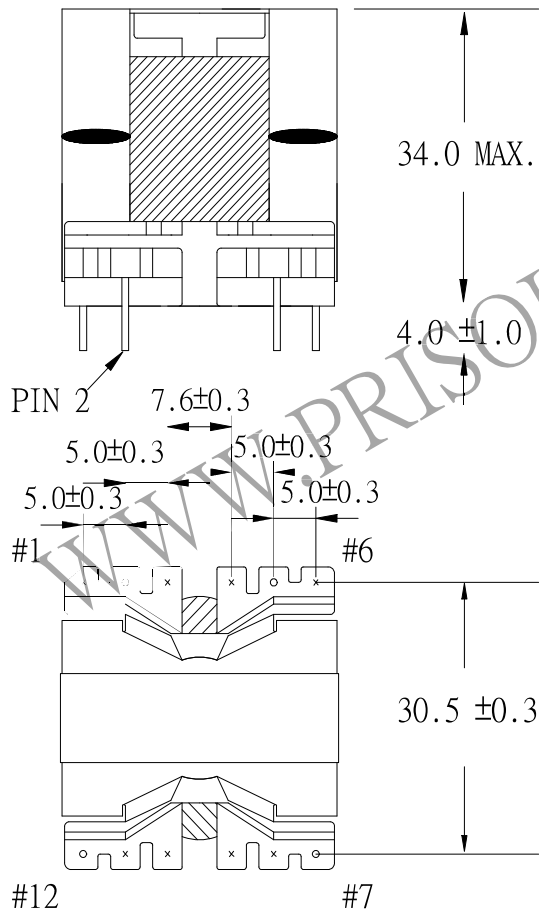


1. MECHANICAL & ASSEMBLY :

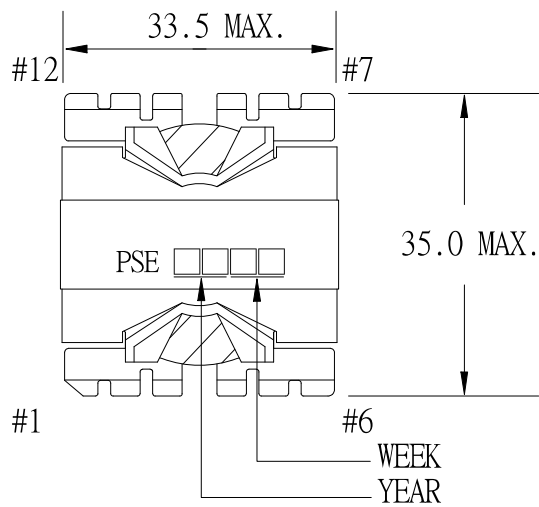

NOTE:

1. PIN 1,3,4,6,8,9,10,11 NO.
2. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS)
3. ADD ONE DROPS OF GLUE INSIDE OF THE CORE TOP.

UNIT : m/ m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-17022	REV NO.
			ISSUE NO :	PAGE
				4 - 1

## 2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	URNS	LAYER TAPE	TUBE	METHOD
1	P		5 - 2	0.10 $\phi$ /100C	39	2Ts		CLOSE

NOTE:

## 3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 10 KHz, 1.0Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO(V) f= KHz	DCR MAX AT 25°C
5 - 2	200.0uH $\pm$ 10%			65.5 M $\Omega$

HI-POT TEST : (AT 1 mA, 2 SEC)


PRI TO CORE. 720 VAC

INSULATION RESISTANCE: (AT DC 500V)


PRI TO CORE. 100 M $\Omega$  MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 54P-17022	REV NO.
			ISSUE NO :	PAGE 4 - 2

4. WINDING SEQUENCE:

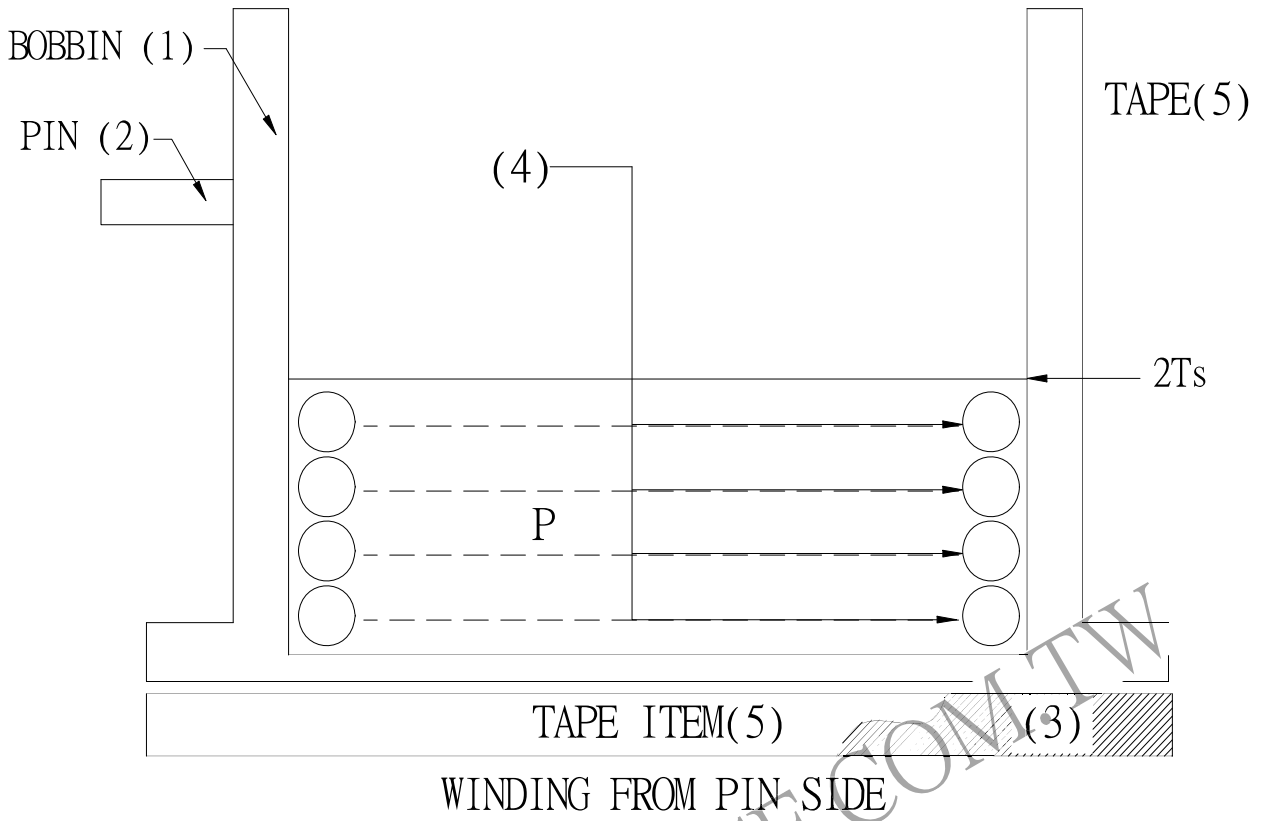

5. SCHEMATIC:

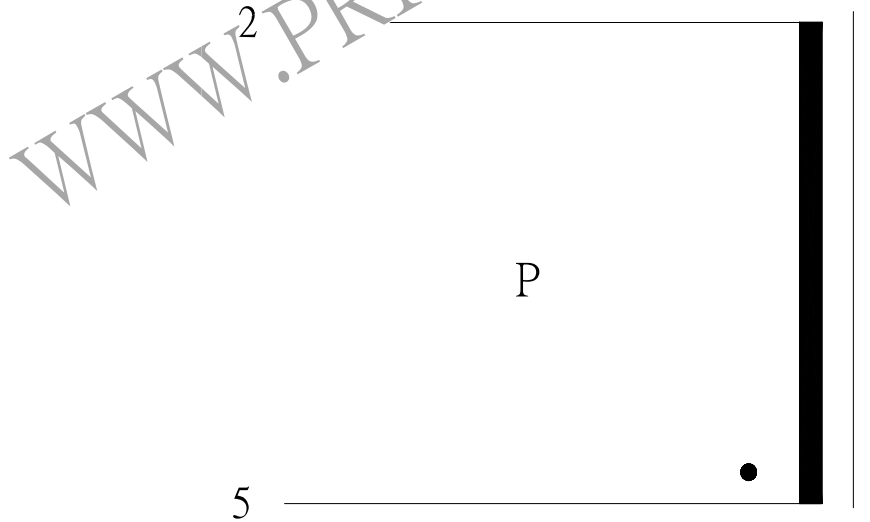

REPORT BY	CHECK BY	APPROVED	CUSTOMER :	DATE	
			PART NO : 54P-17022	REV NO.	
			ISSUE NO :	PAGE	4 - 3