
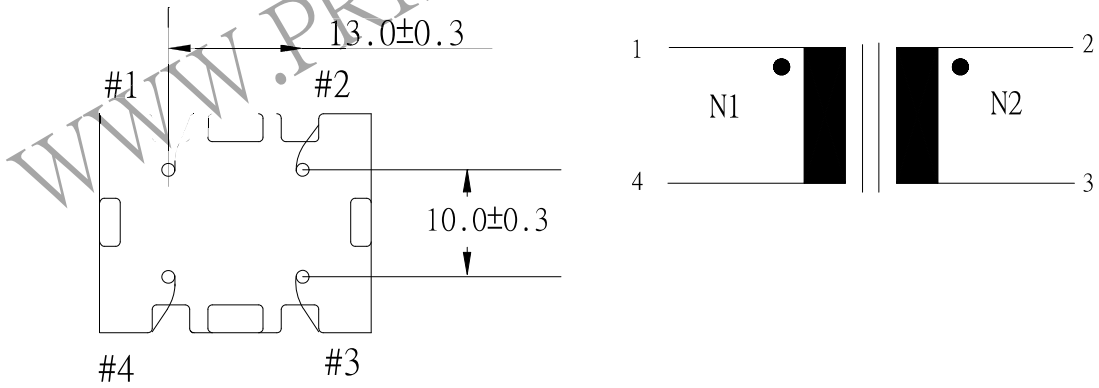
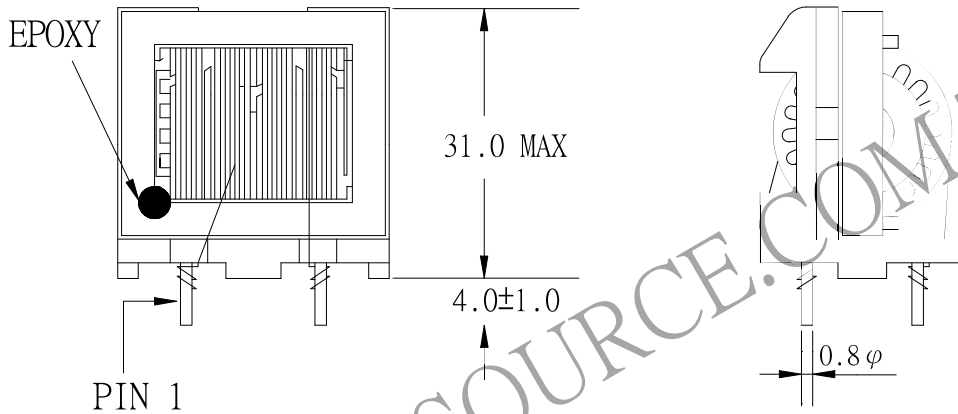


# 1. MECHANICAL & ASSEMBLY :

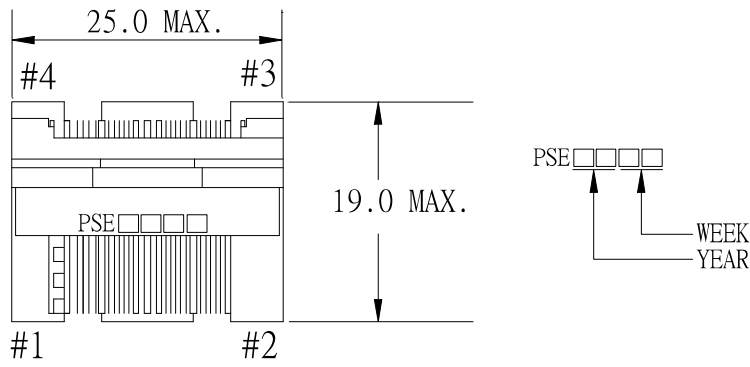

1. EPOXY FIXED BETWEEN CORE & BASE (ONE POINT)

UNIT : m/m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 76F-10008	REV NO.
			ISSUE NO :	PAGE
				3 - 1

## 2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	METHOD
1	N1		1 - 4	0.45φ	70		CLOSE
2	N2		2 - 3	0.45φ	70		CLOSE

NOTE:

## 3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 1 KHz, 0.3Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO(V) F= 20KHz	DCR MAX. AT 25°C
1 - 4	10.0 mHMIN			0.5Ω
2 - 3	10.0 mHMIN			0.5Ω

HI-POT TEST :( AT 2 mA, 2 SEC. )

COIL. TO CORE. 2000 VAC

COIL. TO COIL. 2000 VAC

INSULATION RESISTANCE:(AT DC 500V)

COIL. TO CORE. 100 MΩ MIN.

COIL. TO COIL. 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 76F-10008	REV NO.
			ISSUE NO :	PAGE 3 - 2