

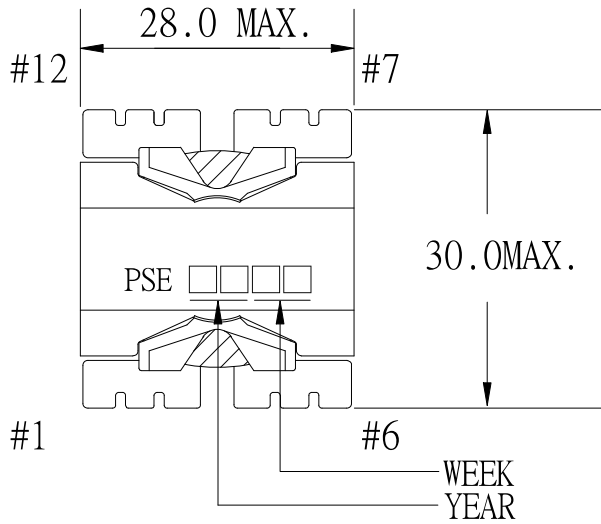
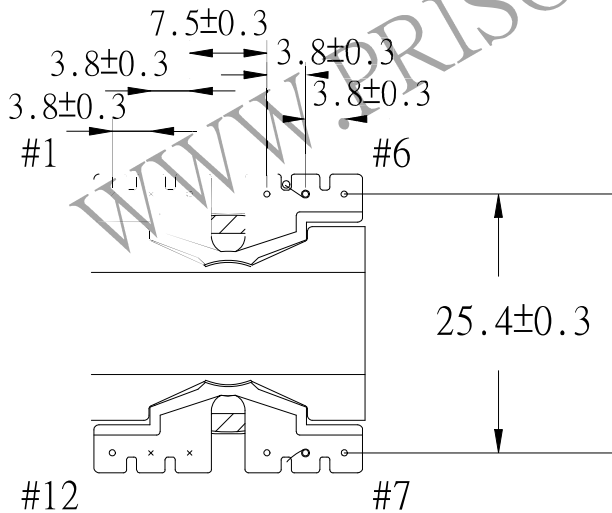
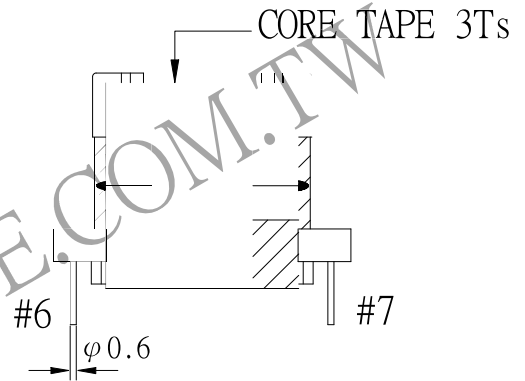


1. MECHANICAL & ASSEMBLY :

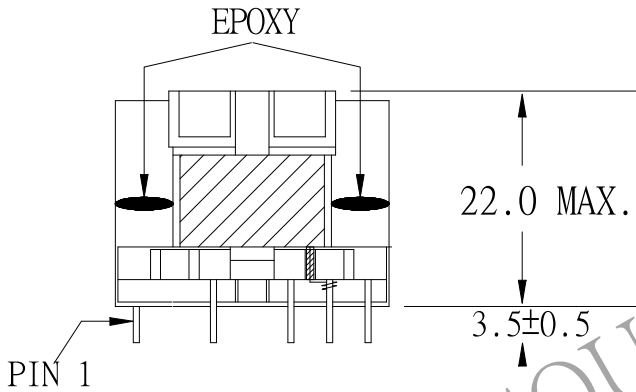

Easy for fixture to insert

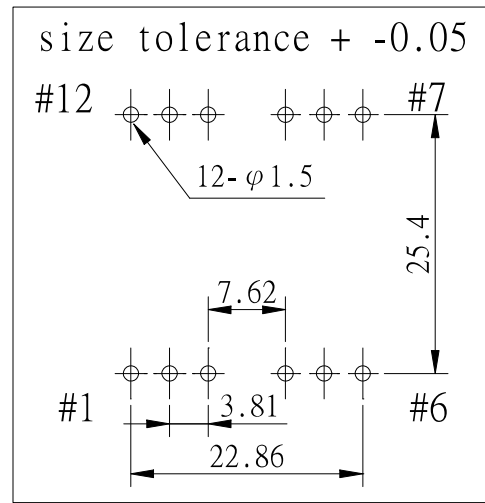

NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS).EPOXY FIXED TOP OF BOBBIN & CORE.(ONE POINT).
2. PIN 1,2,10,11 NO

UNIT:mm

REPORT	BY	CHECK	BY	APPROVED	BY	CUSTOMER :	DATE	
						PART NO : 81P-14010	REV NO.	
						ISSUE NO :	PAGE	4 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	URNS	LAYER TAPE	TUBE	METHOD
1	P1		5 - 8	0.07 ϕ /55C	50.5	3Ts	#18	CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO(V) F= 20KHz	DCR MAX. AT 25°C
5 - 8	420.0uH \pm 10%			0.3 Ω

HI-POT TEST :(AT 1 mA , 2SEC.)


PRI. TO CORE 600 VAC

INSULATION RESISTANCE:(AT DC 500V)


PRI. TO CORE. 100 M Ω MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 81P-14010	REV NO.	
			ISSUE NO :	PAGE	4 - 2

4. WINDING SEQUENCE:

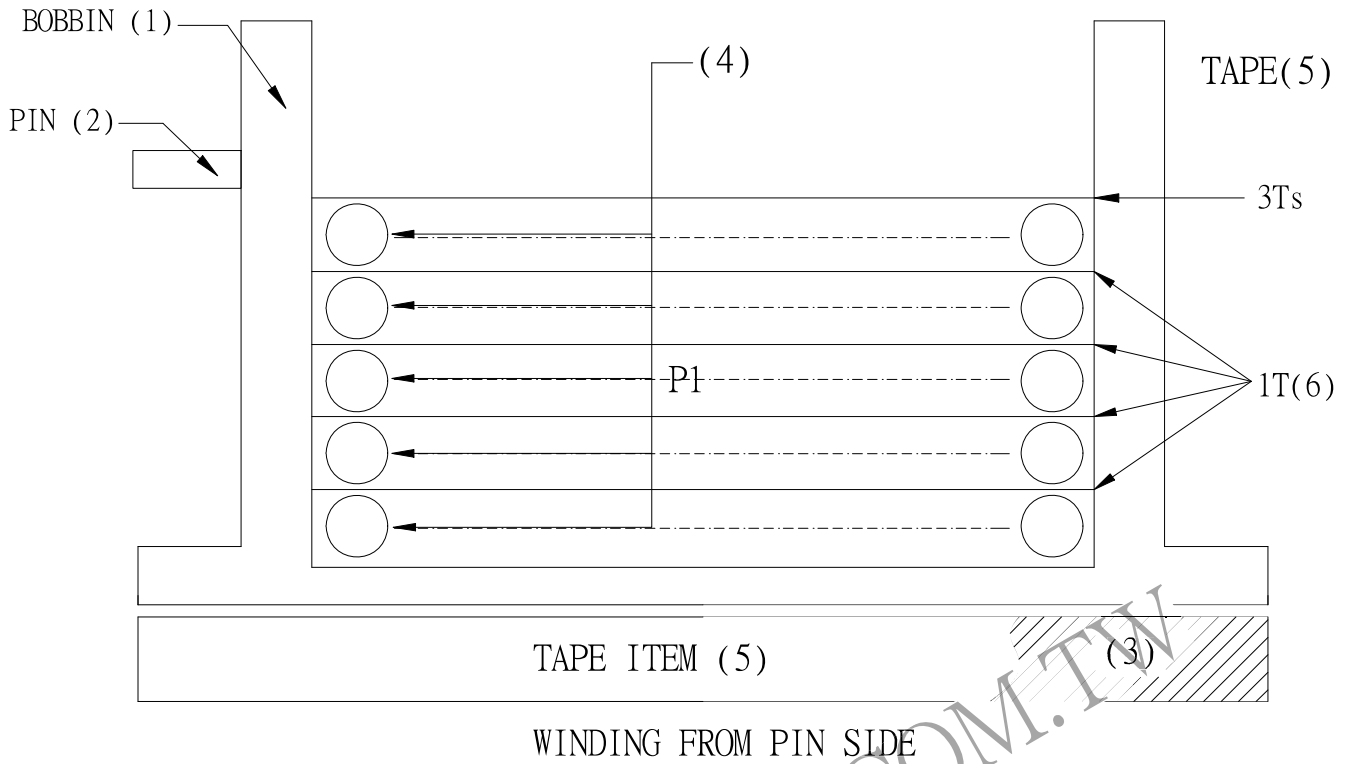

5. SCHEMATIC:

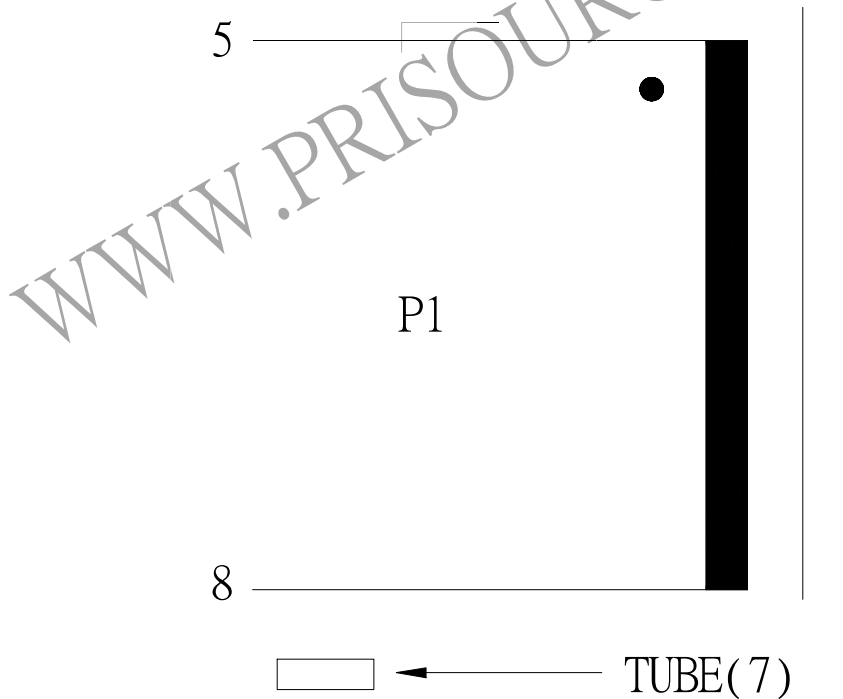

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 81P-14010	REV NO.	
			ISSUE NO :	PAGE	4 - 3