


1. MECHANICAL & ASSEMBLY :

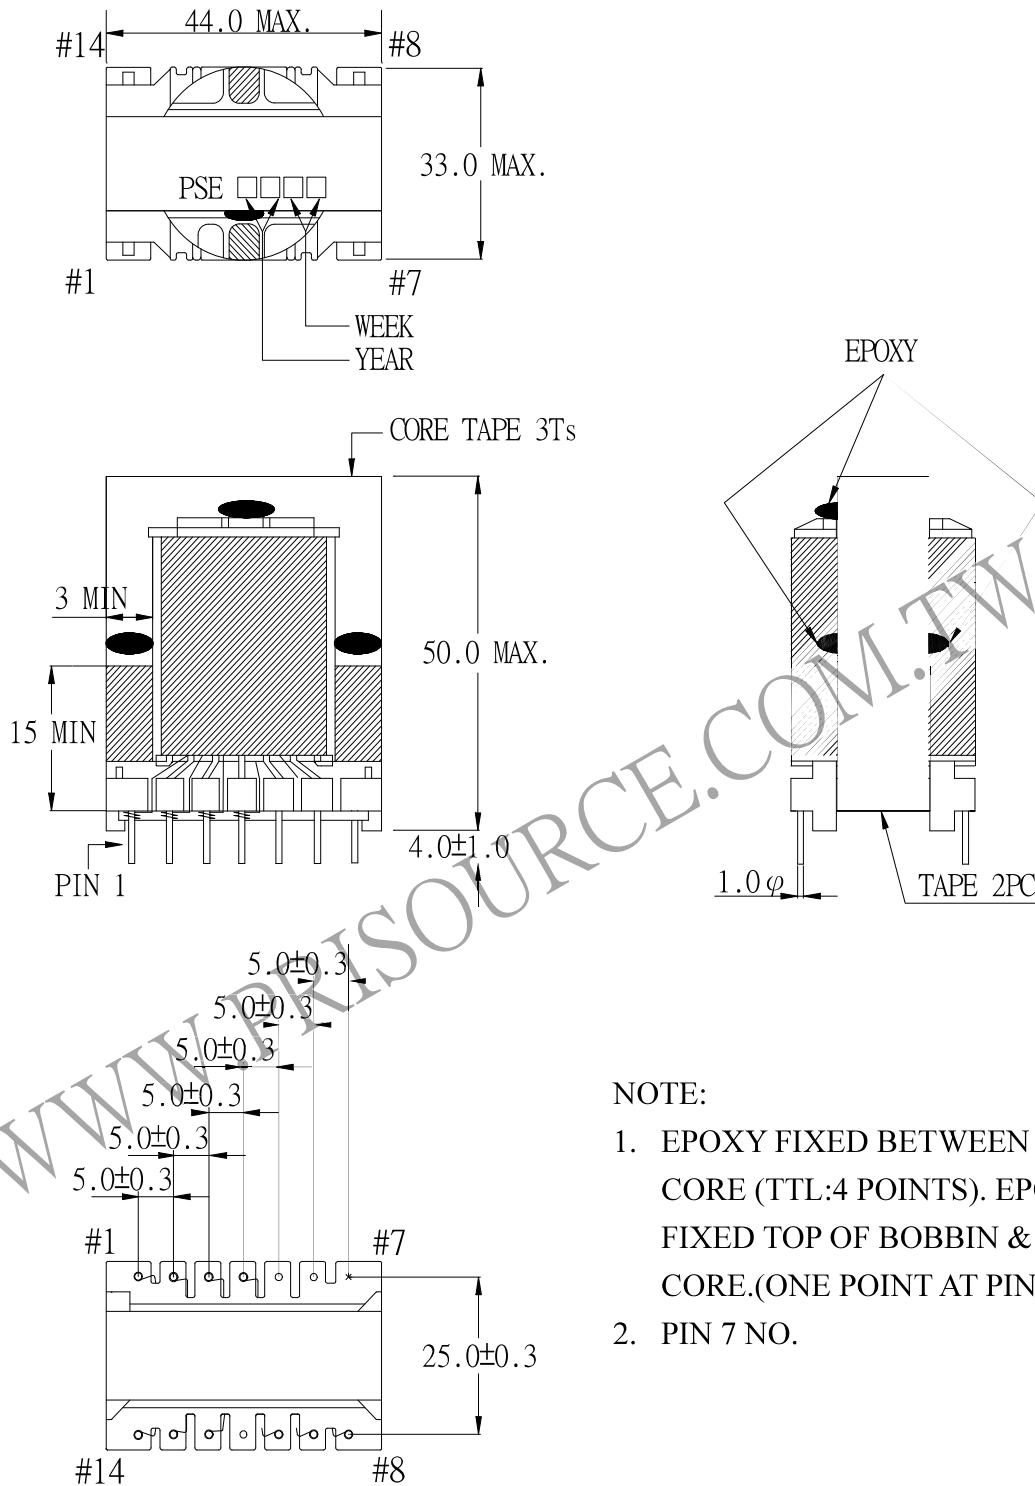

NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS). EPOXY FIXED TOP OF BOBBIN & CORE.(ONE POINT AT PIN1-7 SIDE).
2. PIN 7 NO.

UNIT : m/ m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 81P-15018	REV NO.	
			ISSUE NO :	PAGE	4 - 1

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER	METHOD
1	NP1	2.0mm/2.0mm×2Ts	4 - 3	TEX-E 0.6φ×2	13	2Ts	CLOSE
2	NS1	2.0mm/1.5mm×7Ts	8,9,10 - 12,13,14	1.1φ×3	12	1T/2Ts	CLOSE
3	NP1'	2.0mm/2.0mm×2Ts	2 - 1	TEX-E 0.6φ×2	13	3Ts	CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 1 KHz, 1Vrms	INDUCTANCE 100KHz, 1Vrms+DC10A	VOLTAGE RATIO(V) f= 20KHz	DCR MAX. AT 25°C
4 - 1	1.89mH MIN		INPUT 1 Vrms	
8,9,10- 12,13,14			0.4615Vrms±3.0%	10.0 mΩ
2 - 1			0.5000Vrms±2.0%	40.0 mΩ
4 - 3				30.0 mΩ
2,3	SHORT		SHORT	

HI-POT TEST : (AT 1 mA, 2 SEC)


PRI. TO SEC. 3960 VAC
 PRI. TO CORE 3960 VAC

INSULATION RESISTANCE: (AT DC 500V)


PRI. TO SEC. 100 MΩ MIN.
 PRI. TO CORE. 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-15018	REV NO.
			ISSUE NO :	PAGE 4 - 2

4. WINDING SEQUENCE:

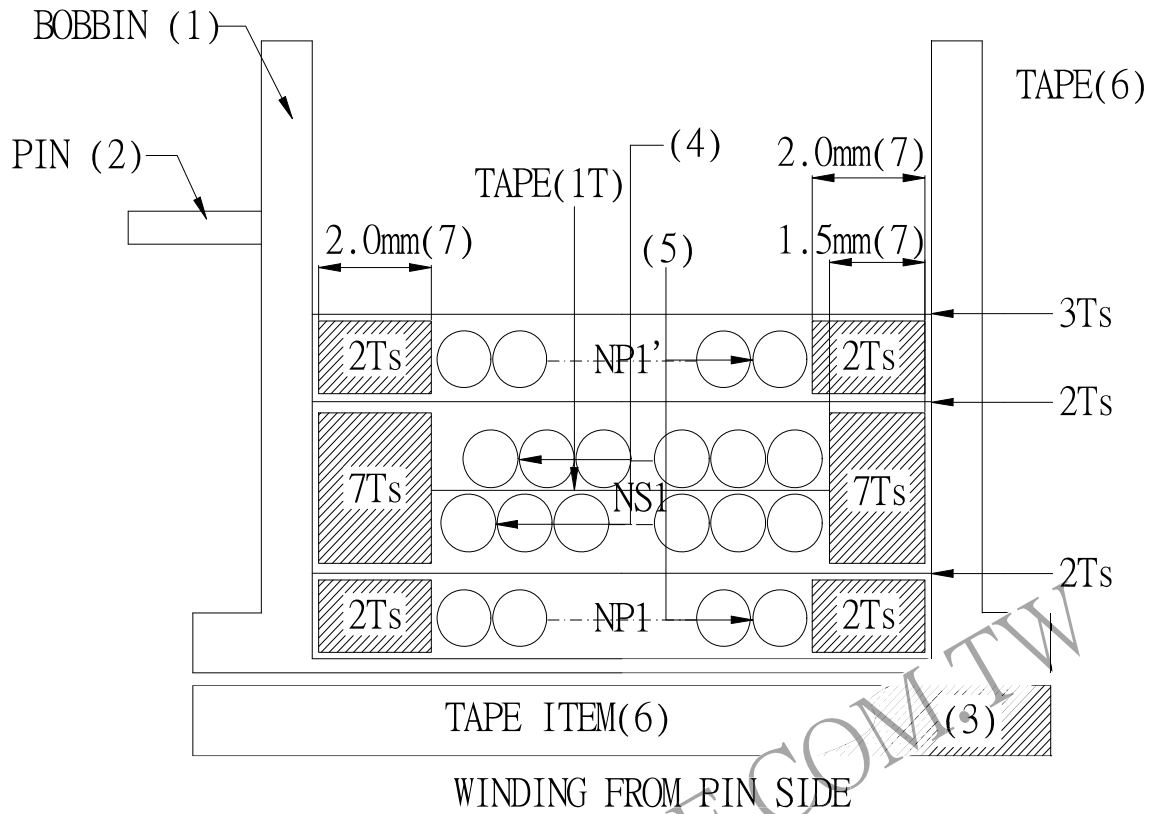

5. SCHEMATIC:

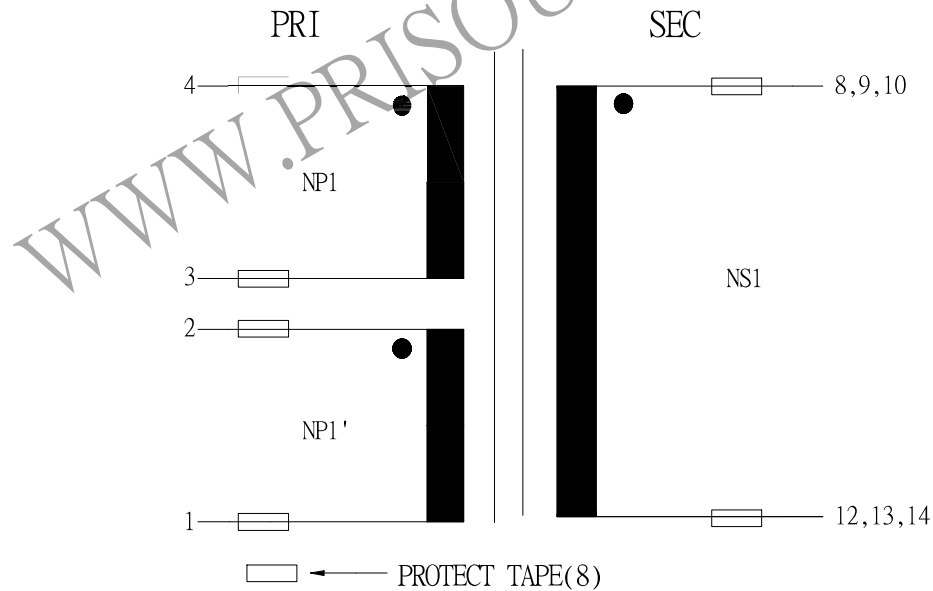

REPORT BY	CHECK BY	APPROVED	CUSTOMER :	DATE	
			PART NO : 81P-15018	REV NO.	
			ISSUE NO :	PAGE	4 - 3