

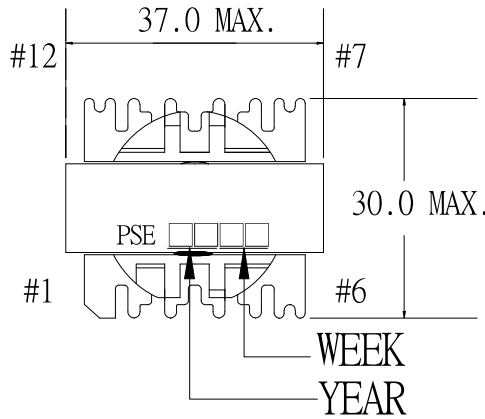
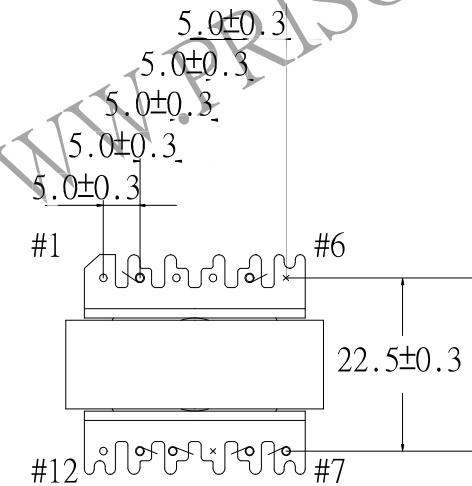


1. MECHANICAL & ASSEMBLY :

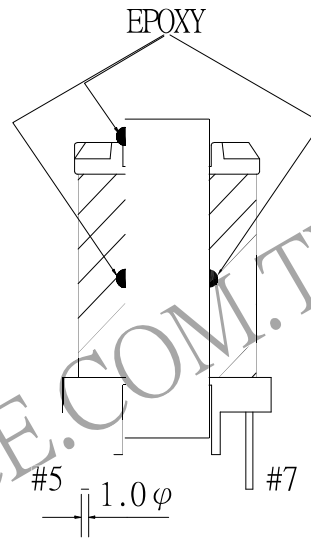


NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS). EPOXY FIXED TOP OF BOBBIN & CORE.(ONE POINT AT PIN1-6 SIDE).
2. PIN 6,9 NO.

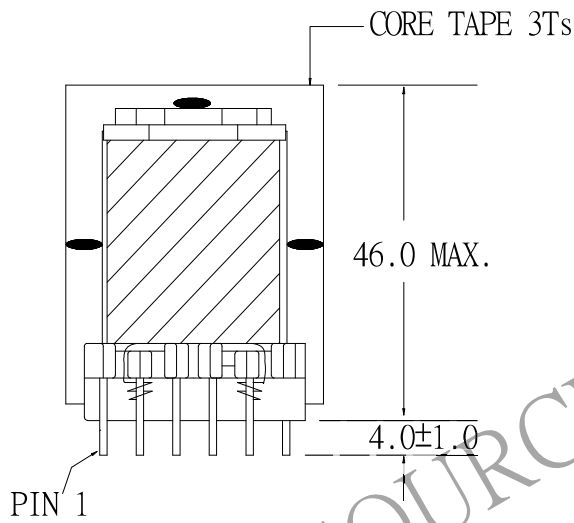

以下の治具に容易に挿入できること。



UNIT:m/m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-16020	REV NO.
			ISSUE NO :	PAGE
				4 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	TUBE	METHOD
1	P1	2.5mm/2.5mm×3Ts	2 - 5	TEX-E 0.50φ	55	3Ts		CLOSE
2	S12	4.5mm/4.5mm×2Ts	8 - 10	0.45φ×3	11	3Ts		SPACE
3	S12'	4.5mm/4.5mm×2Ts	7 - 11	0.45φ×3	11	3Ts		SPACE
4	P1'	2.5mm/2.5mm×3Ts	2 - 5	TEX-E 0.50φ	55	3Ts		CLOSE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	LEAKAGE INDUCTANCE 100 KHz, 1.0Vrms	VOLTAGE RATIO(V) F= 20KHz INPUT 1Vrms	DCR MAX. AT 25°C
2 - 5	5.5mH MIN	8.9uH MAX		175.0 mΩ
8 - 10		SHORT	0.2000Vrms±4.0%	29.0 mΩ
7 - 11		SHORT	0.2000Vrms±4.0%	31.0 mΩ

HI-POT TEST :(AT 1 mA 1 SEC)

PRI. TO SEC. 3600 VAC
PRI TO CORE 3600 VAC


INSULATION RESISTANCE:(AT DC 500V)

PRI. TO SEC. 100 MΩ MIN.
PRI TO CORE. 100 MΩ MIN.


IMPULSE TEST :1200V -P(2 - 5)

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-16020	REV NO.
			ISSUE NO :	PAGE 4 - 2

4. WINDING SEQUENCE:

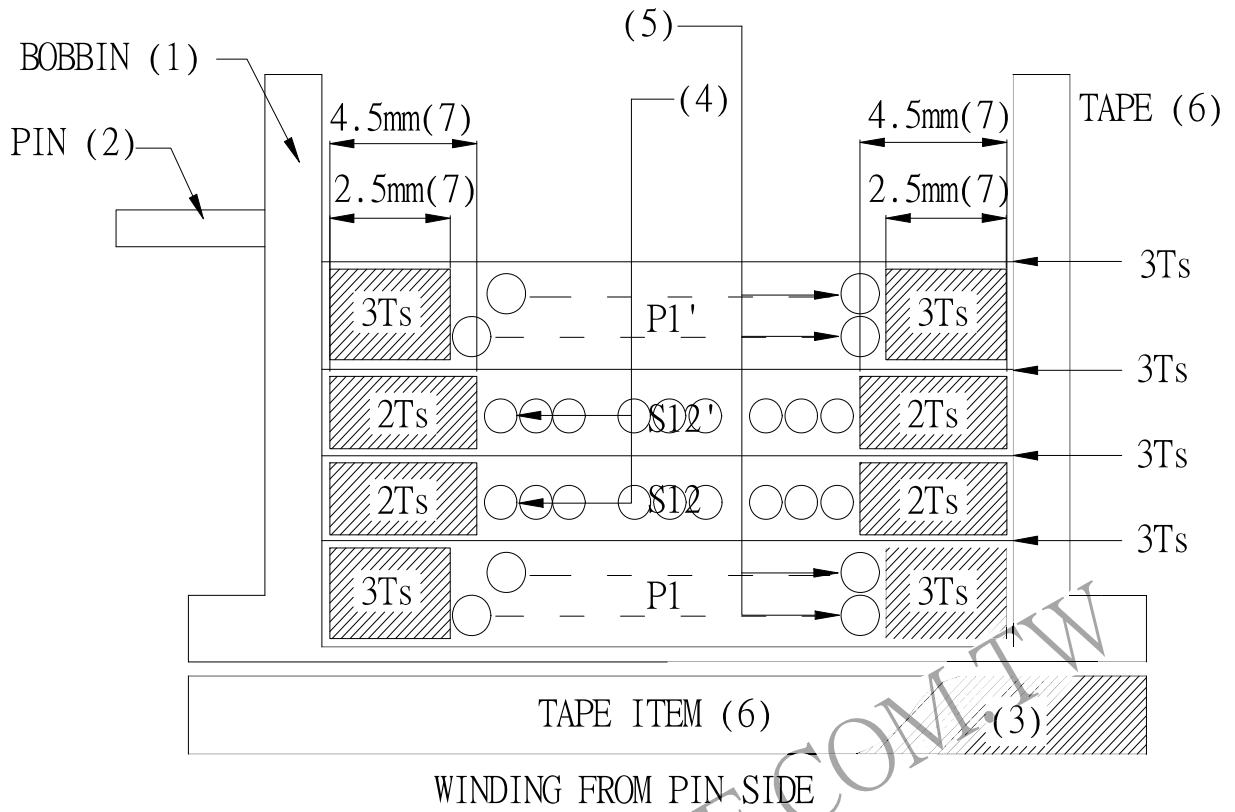

5. SCHEMATIC:

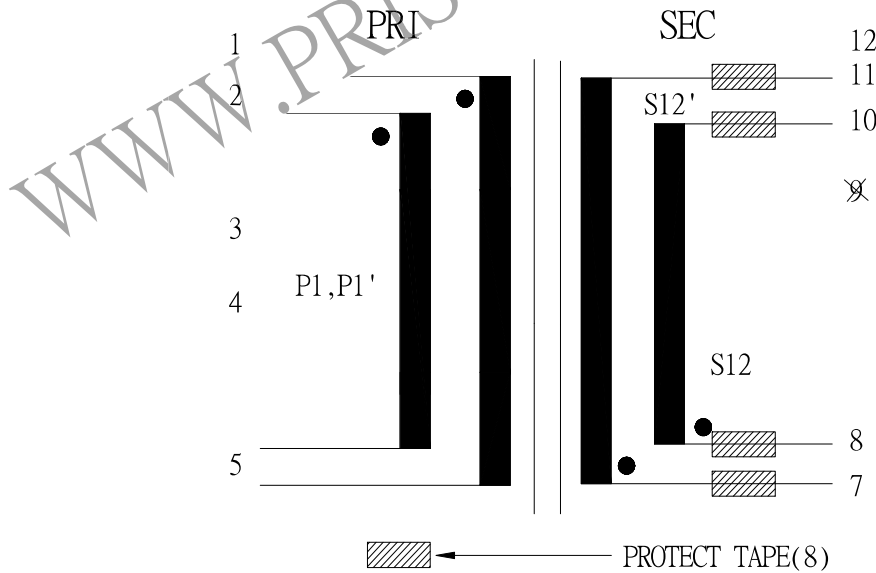

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 81P-16020	REV NO.	
			ISSUE NO :	PAGE	4 - 3