



# 1. MECHANICAL & ASSEMBLY :


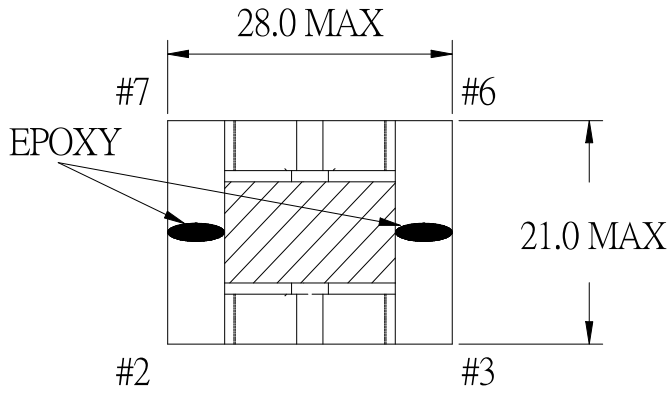


## NOTE:

1. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS). EPOXY FIXED BETWEEN OF BOBBIN & CORE.(ONE POINT AT PIN1-2 SIDE).
2. PIN 3 NO.

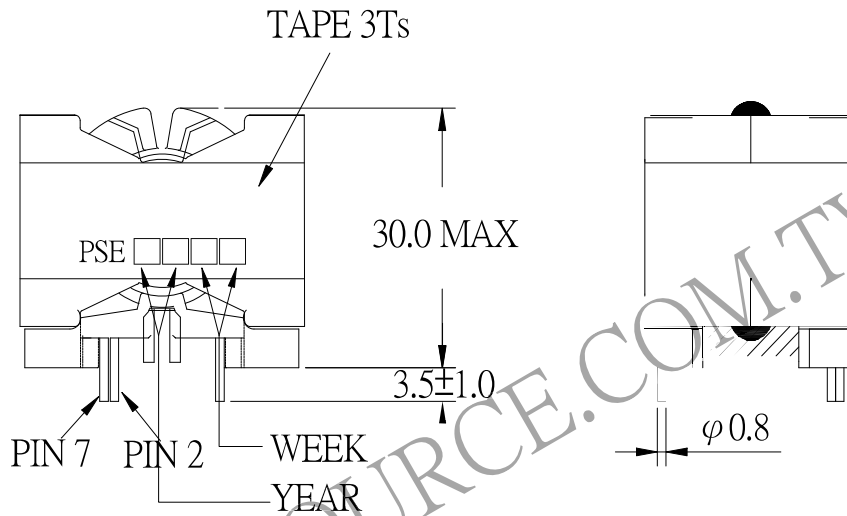

以下の治具に容易に挿入できること。

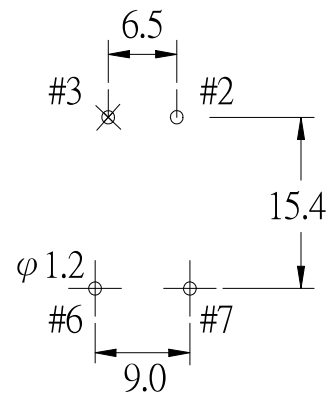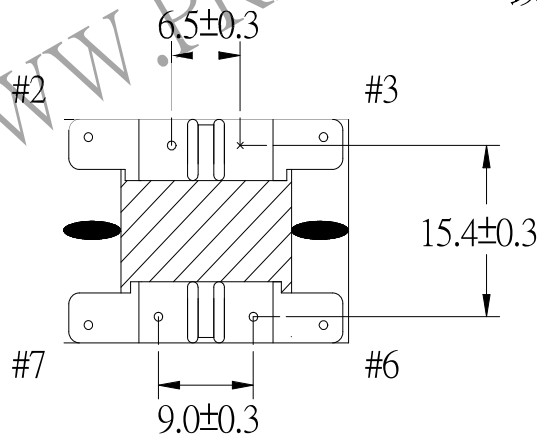

UNIT:m/m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-16027	REV NO.
			ISSUE NO :	PAGE
				4 - 1

## 2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	URNS	LAYER TAPE	TUBE	METHOD
1	P1		7 - 2	TEX-E 1.0φ	8	3Ts		CLOSE

NOTE:

## 3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 100 KHz, 0.1Vrms	LEAKAGE INDUCTANCE 100 KHz, 1.0Vrms	VOLTAGE RATIO(V) F= 20KHz	DCR MAX. AT 25°C
7 - 2	21.0uH ±10%			12.0 mΩ

HI-POT TEST :( AT 1 mA 2 SEC)


PRI TO CORE 600 VAC

INSULATION RESISTANCE:(AT DC 500V)


PRI TO CORE. 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 81P-16027	REV NO.	
			ISSUE NO :	PAGE	4 - 2

4. WINDING SEQUENCE:

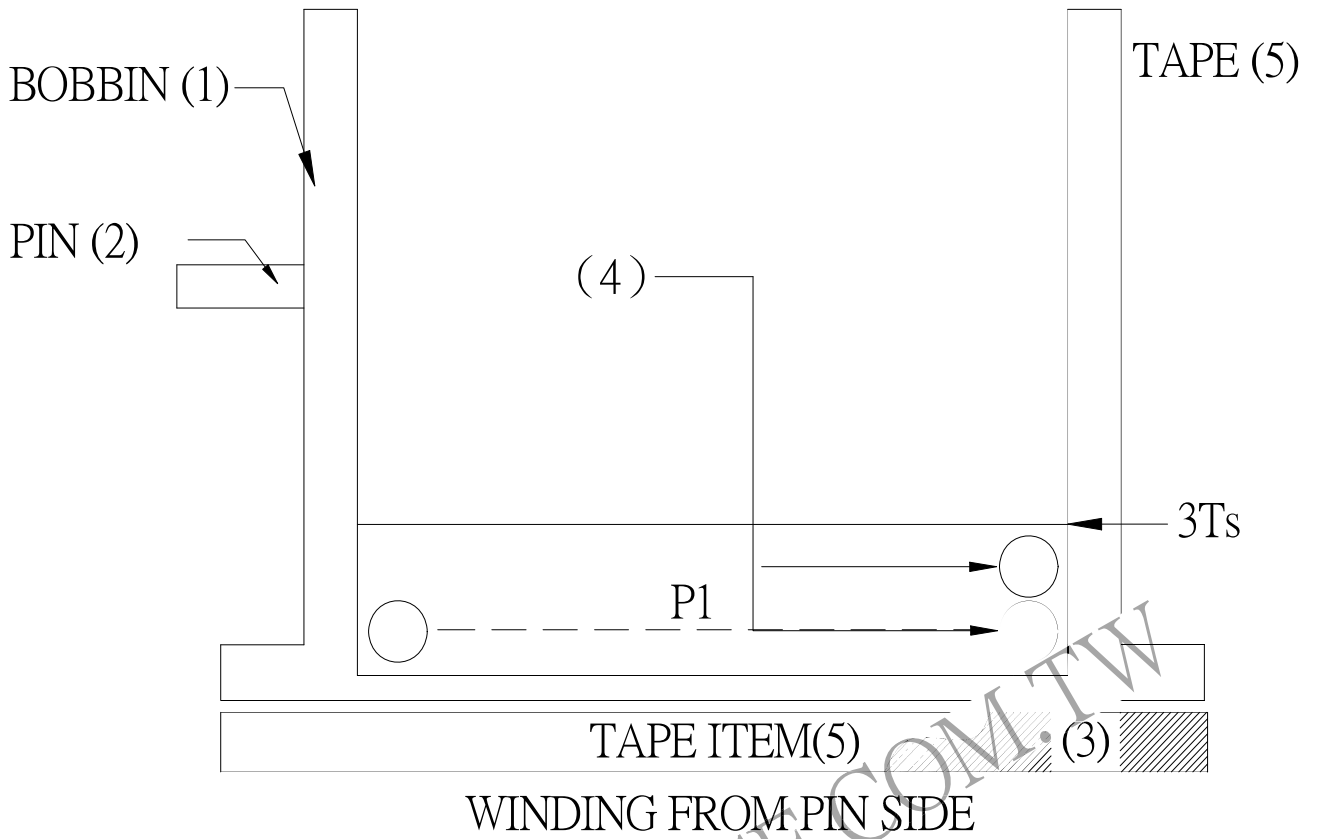

5. SCHEMATIC:

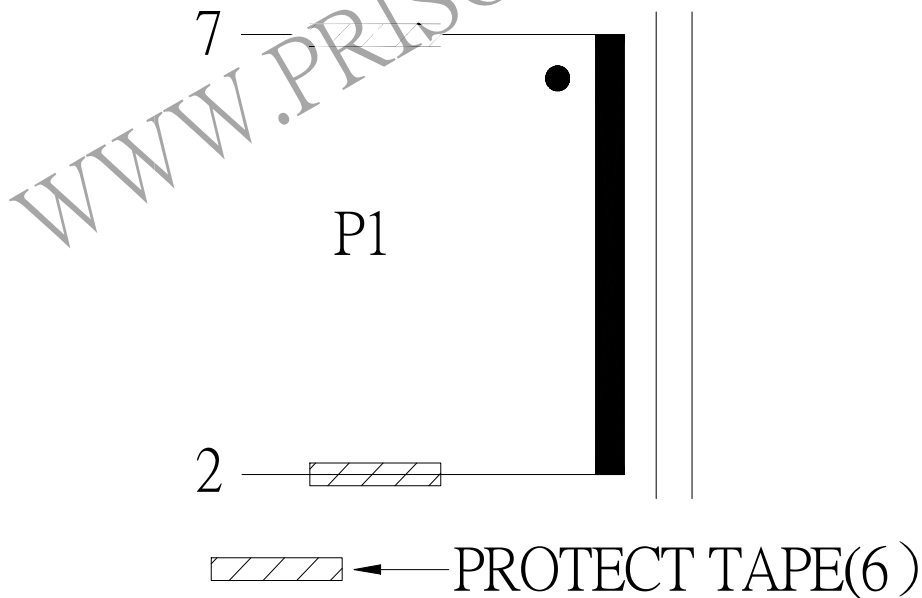

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 81P-16027	REV NO.	
			ISSUE NO :	PAGE	4 - 3