

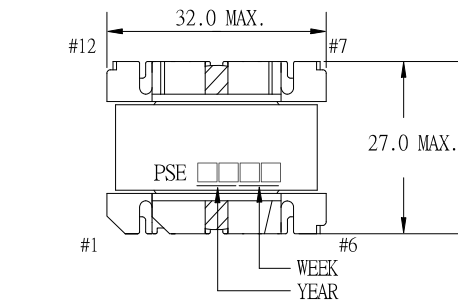
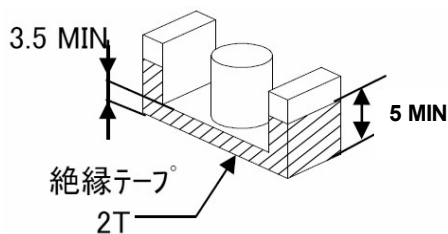


1. MECHANICAL & ASSEMBLY :

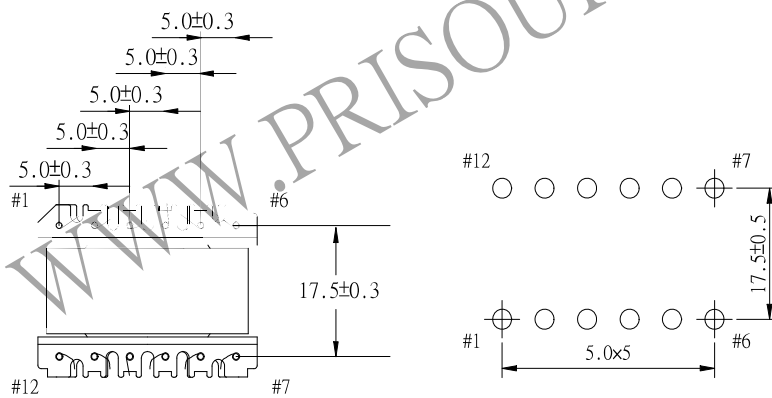

NOTE:

1. ADD ONE DROPS OF GLUE INSIDE OF THE CORE TOP.
2. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS).

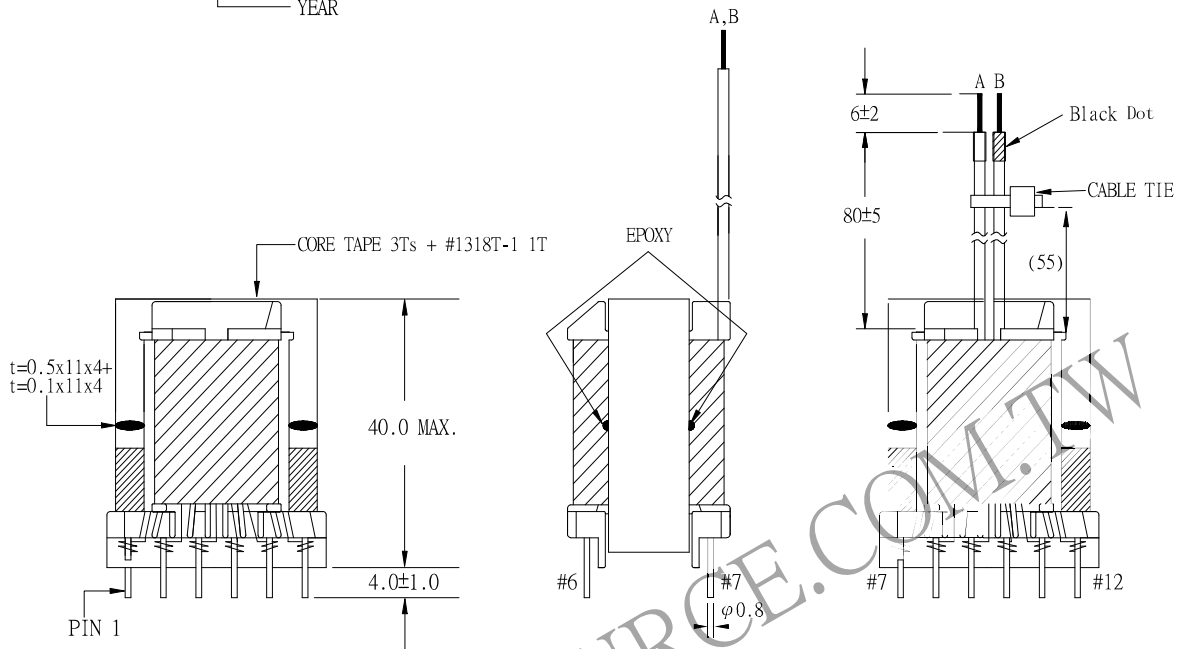

UNIT:m/m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-17010	REV NO.
			ISSUE NO :	PAGE 4 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER	TUBE	METHOD
1	P1	4.0mm/~×2Ts	3 - 1	0.40φ	38	3Ts		SPACE
2	S1	6.0/6.0mm×1T	8 - 9	0.25φ×4	7	1T		SPACE
3	S2	5.0/5.0mm×1T	7 - 8	0.25φ×4	8	1T		SPACE
4	S3	5.0/5.0mm×1T	8 - 10	0.25φ×4	8	1T		SPACE
5	S4	5.0/5.0mm×1T	11 - 12	0.25φ×4	8	1T		SPACE
6	S5	5.0/5.0mm×1T	A - B	0.40φ	9	1T	φ0.8/φ0.8	SPACE
7	S6	6.0/6.0mm×1T	8 - 9	0.25φ×4	7	3Ts		SPACE
8	P2	4.0mm/~×2Ts	1 - 4	0.40φ	38	1T		SPACE
9	P3	6.0/6.0mm×1T	5 - 6	0.25φ×4	7	1T		SPACE
10	P4	6.0/6.0mm×1T	3 - 2	0.25φ×2	3	3Ts		SPACE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1.0 KHz, 1.0Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO(V) F= 20KHz	DCR MAX. AT 25°C
3 - 4	750uH±15%		INPUT 1Vrms	0.65 Ω
3 - 1			0.4972Vrms±4.0%	0.25 Ω
8 - 9			0.0884Vrms±5.0%	22.5 mΩ
7 - 8			0.1017Vrms±4.0%	46.0 mΩ
8 - 10			0.1013Vrms±4.0%	47.0 mΩ
11 - 12			0.1016Vrms±4.0%	51.0 mΩ
A - B			0.1159Vrms±4.0%	119.0 mΩ
1 - 4			0.5009Vrms±3.0%	0.40 Ω
5 - 6			0.0888Vrms±5.0%	52.0 mΩ
3 - 2			0.0387Vrms±7.0%	53.0 mΩ

HI-POT TEST:(AT 1 mA, 2SEC.)


PRI. TO SEC. 3600 VAC

INSULATION RESISTANCE:(AT DC 500V)


PRI. TO SEC. 100 MΩ MIN
 PRI. TO CORE. 100 MΩ MIN.
 SEC. TO CORE. 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-17010	REV NO. NO.
			ISSUE NO :	PAGE
				4 - 2

4. WINDING SEQUENCE:

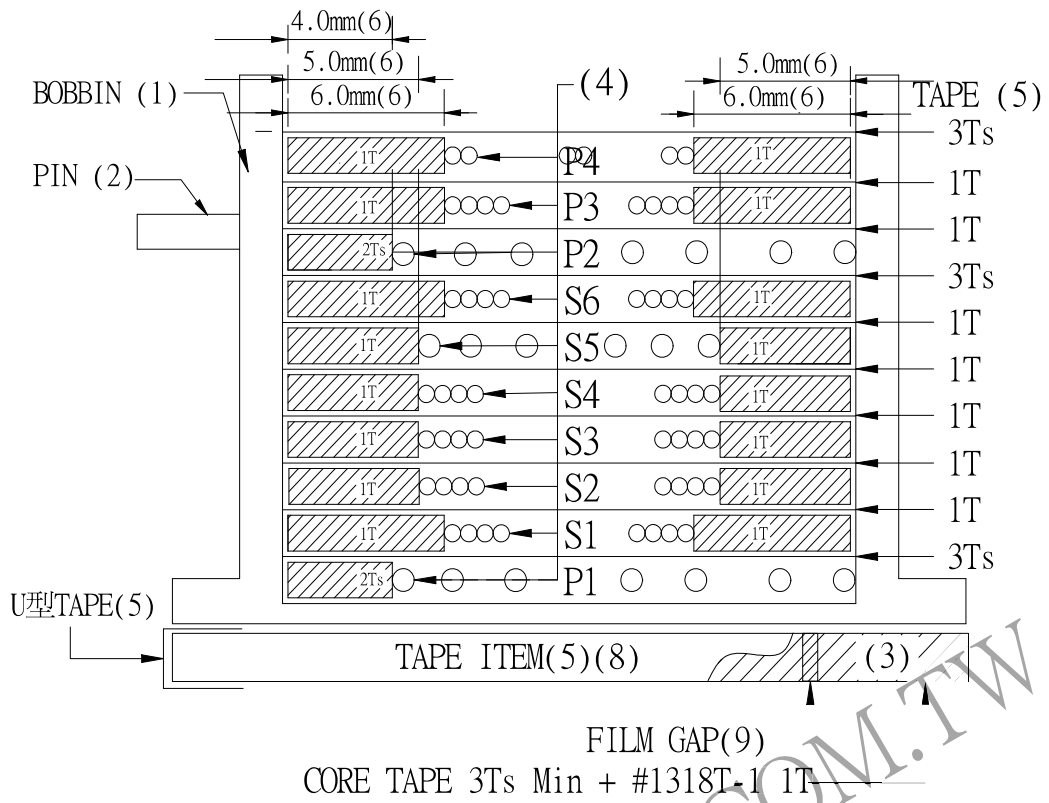

5. SCHEMATIC:

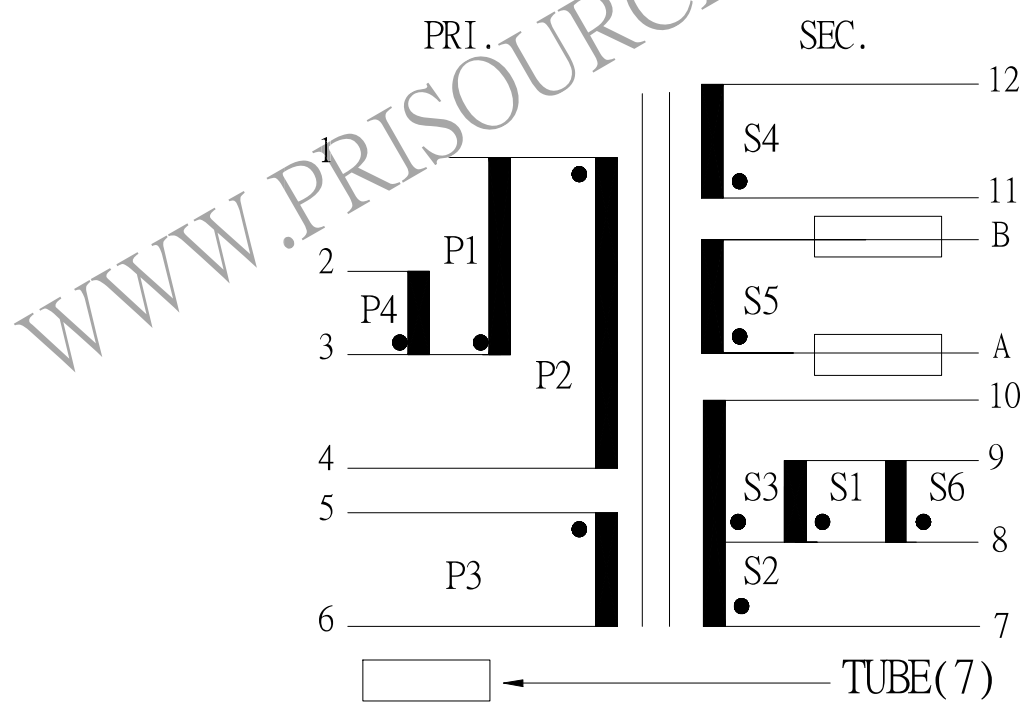

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 81P-17010	REV NO.
			ISSUE NO :	PAGE
				4 - 3