

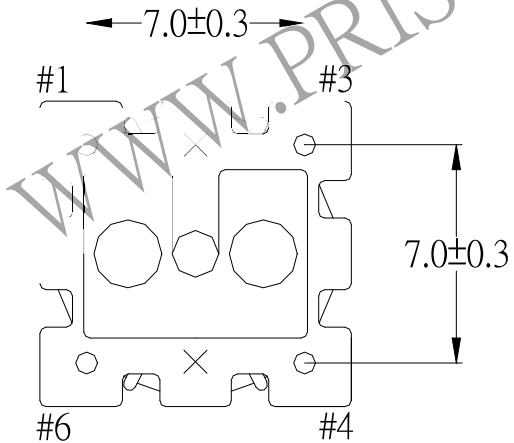
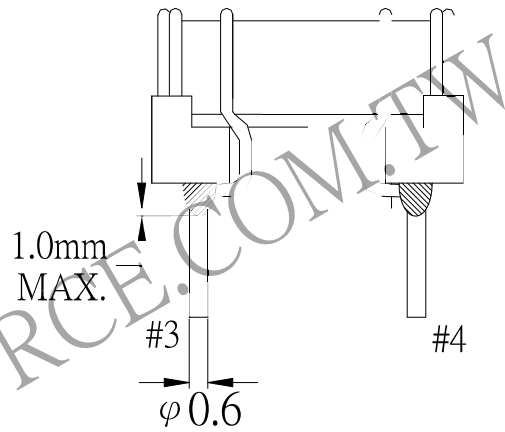
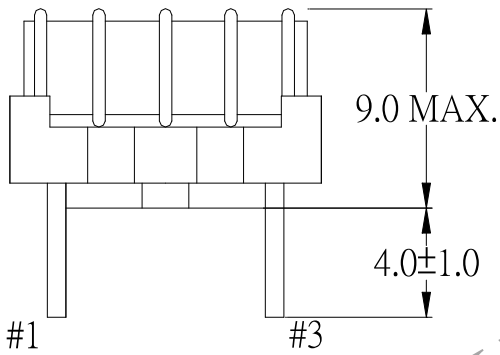


1. MECHANICAL & ASSEMBLY :

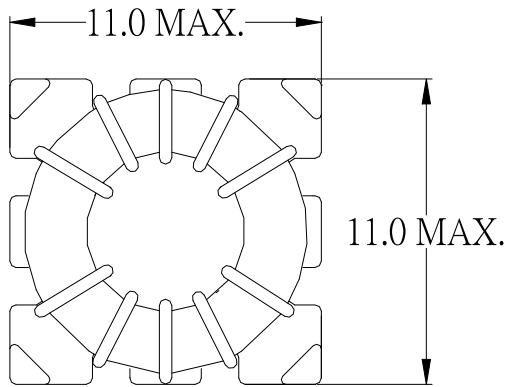

2. SCHEMATIC:

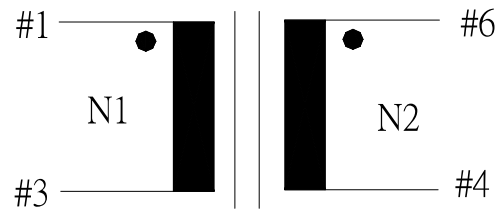

UNIT : mm

NOTE: 1. PIN 2 , PIN 5 NO

2. SOLDER CAN BE OVER BOTTOM OF BASE 1.0mm MAX.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 83F-15002	REV NO.
			ISSUE NO :	PAGE
				3 - 1

2. WINDING CONFIGURATION:

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	METHOD
1	N1		1 - 3	0.50φ	5Ts		
2	N2		6 - 4	0.50φ	5Ts		

NOTE:

3. ELECTRICAL CHARACTERISTICS:

PIN NO.	INDUCTANCE 100 KHz, 0.3Vrms	LEAKAGE INDUCTANCE KHz, Vrms	VOLTAGE RATIO F= 20KHz	DCR MAX. AT 25°C
1 - 3	21.0 uH ± 30%		INPUT 0.1 Vrms	10.0 mΩ
6 - 4	21.0 uH ± 30%		0.0990Vrms±4.0%	10.0 mΩ

HI-POT TEST :(AT 1mA, 2 SEC.)

N1 TO N2 1200 VAC

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE
			PART NO : 83F-15002	REV NO.
			ISSUE NO :	PAGE 3 - 2