
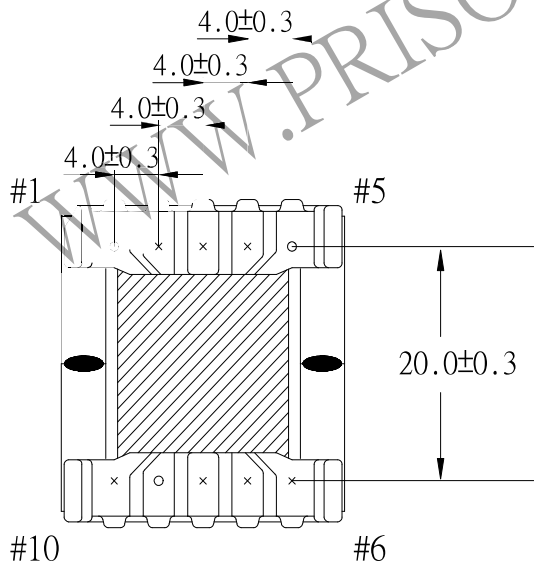
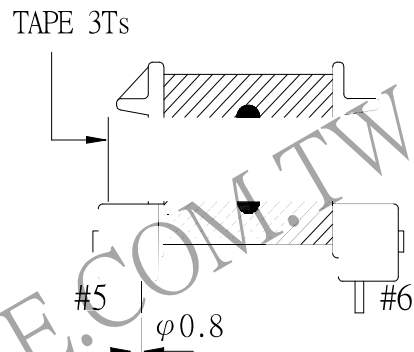
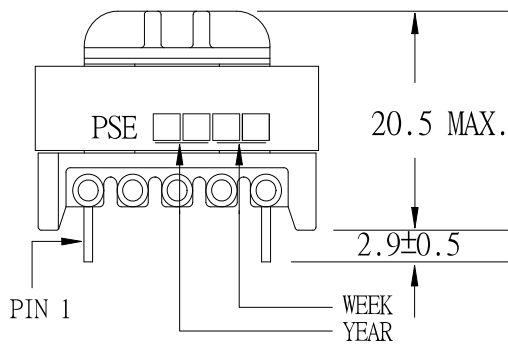


# 1. MECHANICAL & ASSEMBLY :

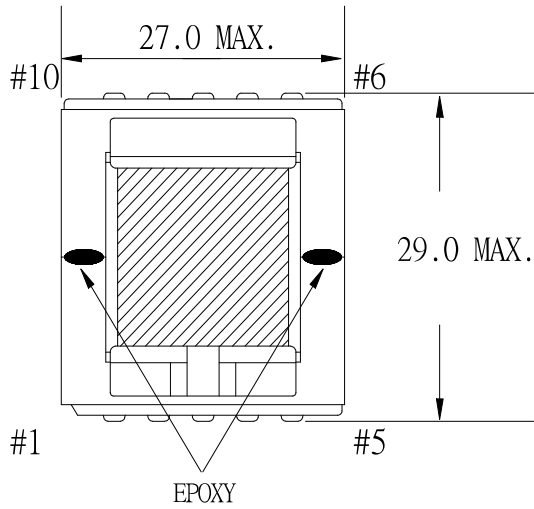

## NOTE:

1. PIN 2,3,4,6,7,8,10 NO.
2. EPOXY FIXED BETWEEN CORE & CORE (TTL:4 POINTS)
3. EPOXY FIXED BETWEEN OF BOBBIN & CORE.(ONE POINT AT PIN1-5 SIDE).

UNIT : m m

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 83P-17005	REV NO.	
			ISSUE NO :	PAGE	4 - 1

2. WINDING CONFIGURATION :

STEP	WINDING	MARGIN TAPE	START-FINISH	COPPER WIRE	TURNS	LAYER TAPE	TUBE	METHOD
1	N1		1 - 9	0.1φ/15	119	1T/1T/1T/1T/1T/1T/2Ts		CLLOSE SPACE

NOTE:

3. ELECTRICAL CHARACTERISTICS :

PIN NO.	INDUCTANCE 1 KHz, 0.3 Vrms	LEAKAGE INDUCTANCE 50 KHz, 0.1Vrms	VOLTAGE RATIO(V) F= 20KHz	DCR MAX. AT 25°C
1 - 9	2.26mH±10%			1.0 Ω

HI-POT TEST :( AT 1 mA , 2SEC. )


N1. TO CORE 600 VAC

INSULATION RESISTANCE:(AT DC 500V)


N1. TO CORE . 100 MΩ MIN.

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 83P-17005	REV NO.	
			ISSUE NO :	PAGE	4 - 2

4. WINDING SEQUENCE:

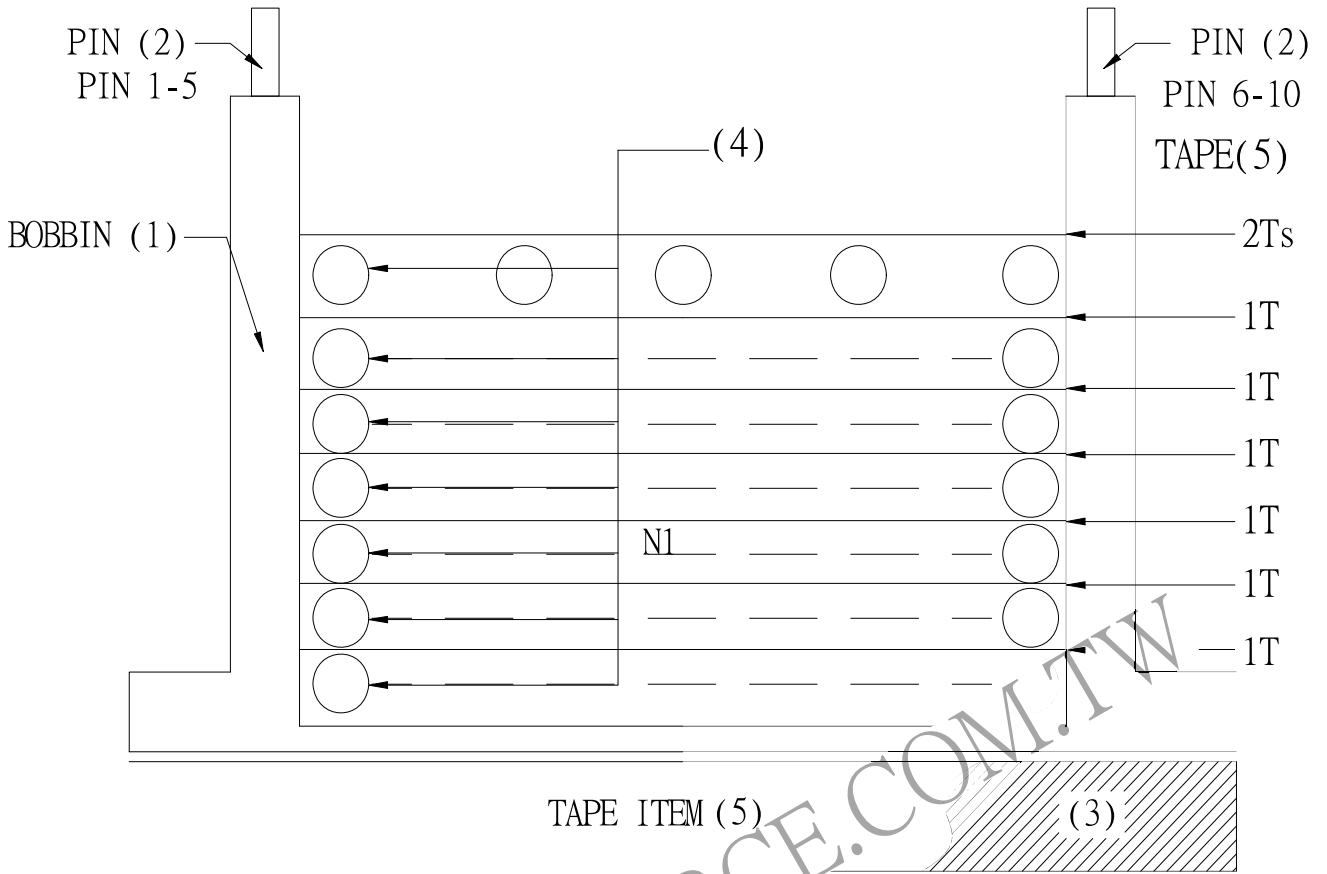

5. SCHEMATIC:

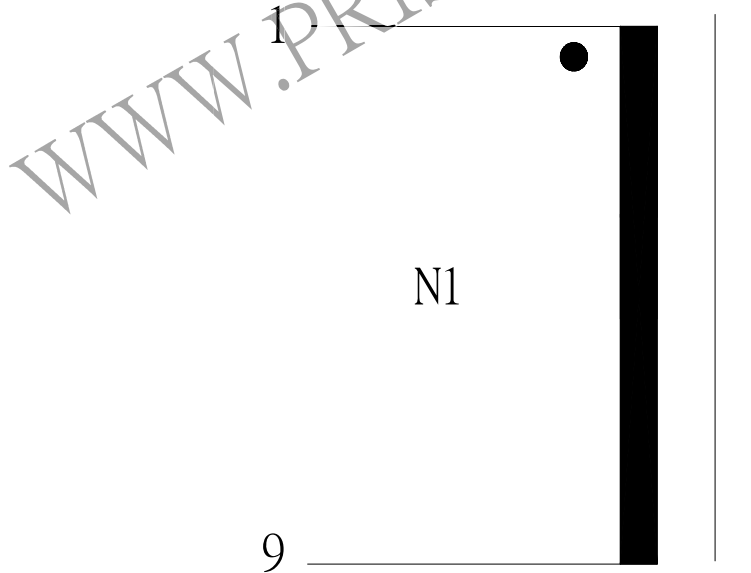

REPORT BY	CHECK BY	APPROVED BY	CUSTOMER :	DATE	
			PART NO : 83P-17005	REV NO.	
			ISSUE NO :	PAGE	4 - 3